INCA 2000

4 × 500 W @ 4–8 ? / 2 × 1000 W @ 70/100 V, 4-CHANNEL AMPLIFIER, 2U RACK WIDTH, INTEGRATED DSP

INCA 2000

The Inca 2000 is a four-channel, 19-inch rack-mount amplifier in a 2U format, designed to deliver high performance and power for professional audio installations and distributed sound systems. It supports both low-impedance (Lo-Z) applications and 70/100 V constant-voltage (Hi-Z) systems, offering different output configurations to meet the requirements of each installation. Featuring a universal 100–240 V power supply with integrated PFC, it is suitable for a wide range of AV and commercial installations. It delivers up to 500 W per channel into 2–4 ? loads, or 250 W per channel into 8 ? loads in Lo-Z mode. In Bridge-Tied Load (BTL) mode, it can deliver up to 1000 W across two channels, while in Hi-Z mode it provides 1000 W per channel across two 70/100 V outputs, achieving a total system power of 2000 W.

The amplifier features an integrated full-matrix DSP, configurable via a web browser interface, as well as built-in Wi-Fi connectivity for convenient system management and configuration. It also provides four analogue inputs, one stereo S/PDIF digital input and integrated GPIO control. Leader/Follower functionality with S/PDIF linking allows multiple amplifiers to be connected, while Automatic Power Sharing optimises the distribution of available power according to the connected loads.




70V-100V Line DSP

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

INCA 2000

4 × 500 W @ 4–8 ? / 2 × 1000 W @ 70/100 V, 4-CHANNEL AMPLIFIER, 2U RACK WIDTH, INTEGRATED DSP

HIGHLIGHTS

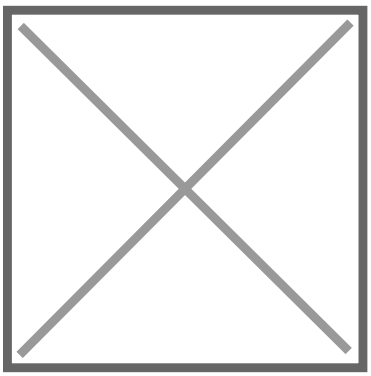


EFFICIENT AND VERSATILE INSTALLATIONS

Housed in a 2U rack chassis, the Inca 2000 delivers 2000 W of total system power across 4 channels. It seamlessly drives both low-impedance (2/4/8 ?) and 70V/100V high-impedance distributed audio systems within a single unit, utilizing automatic power sharing to dynamically optimize output distribution for asymmetric loads.

EMBEDDED FULL-MATRIX DSP WITH VOID ACOUSTICS PRESETS


Equipped with an onboard full-matrix DSP pre-loaded with the official Void Acoustics preset library, it ensures precision loudspeaker tuning and reliable system protection right out of the box. Leader/Follower functionality via S/PDIF linking also allows effortless expansion across multi-amplifier setups.

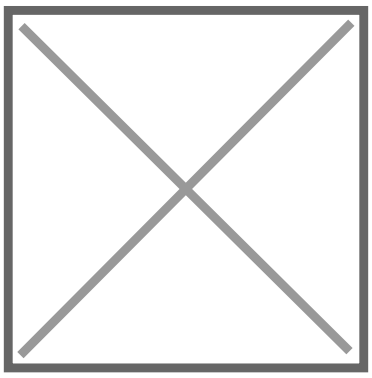

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

INCA 2000

4 × 500 W @ 4–8 ? / 2 × 1000 W @ 70/100 V, 4-CHANNEL AMPLIFIER, 2U RACK WIDTH, INTEGRATED DSP

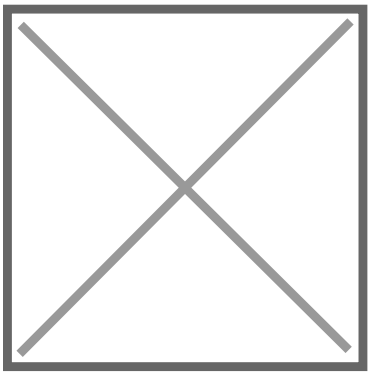

EFFORTLESS SETUP AND BROWSER-BASED WIRELESS CONTROL

Featuring built-in Wi-Fi and a unified web interface, system configuration and monitoring can be handled directly via any standard web browser without dedicated software. Integrated GPIO ports and customizable user controls further streamline daily operation across demanding commercial and hospitality environments.

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

INCA 2000

4 × 500 W @ 4–8 ? / 2 × 1000 W @ 70/100 V, 4-CHANNEL AMPLIFIER, 2U RACK WIDTH, INTEGRATED DSP

PRODUCT DETAILS

KEY FEATURES

- 2U rack format
- Full matrix DSP embedded and controlled via Web Browser
- Integrated GPIO control
- Universal PSU with PFC and low consumption, under 0.5 W in standby mode
- Quick configuration and reliable operation across a wide range of installation environments
- Automatic power sharing to optimise power for asymmetric loads
- Built-in Wi-Fi for fast installation
- Compatibility with 70/100 V Hi-Z or low impedance loads

SPECIFICATIONS

Form Factor	2U full rack width
Output Channels (Lo-Z)	4 channels SE (Single-Ended) / 2 channels BTL (Bridge-Tied Load)
Output Channels (Hi-Z)	2 channels
Output Circuitry	UMAC™ Class D (full bandwidth PWM modulator with ultra-low distortion)
Total System Power	2000 W
Output Power per Channel @ 2? (Lo-Z SE) / 4? (Lo-Z) / 8? (Lo-Z)	4 x 500 W / 4 x 500 W (SE) or 2 x 1000 W (BTL) / 4 x 250 W (SE) or 2 x 1000 (BTL)
Output Power per Channel (@ 70/100V Hi-Z BTL)	2 x 1000 W

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

INCA 2000

4 × 500 W @ 4–8 ? / 2 × 1000 W @ 70/100 V, 4-CHANNEL AMPLIFIER, 2U RACK WIDTH, INTEGRATED DSP

Automatic Powershare (up to)	2 x 250 W (dynamic sharing across channel pairs Ch 1-2 and Ch 3-4)
Output Voltage	45 Vrms (S.E) / 90 Vrms (BTL) / 70/100V (Hi-Z)
Frequency Response	20 Hz – 20 kHz (+0/-0.5 dB into 8 ? load, 3 dB below rated power)
Signal-To-Noise Ratio (SNR)	> 108 dB (A-weighted, 20 Hz – 20 kHz, 8 ? load)
Total Harmonic Distortion (THD+N typical)	< 0.05% (20 Hz – 20 kHz, 8 ? load, 3 dB below rated power)
Propagation Latency (Analogue IN -> Analogue OUT)	1177 µs
Propagation Latency (Analogue IN -> S/PDIF OUT)	458 µs
Propagation Latency (S/PDIF IN -> Analogue OUT)	1833 µs
Propagation Latency (S/PDIF IN -> S/PDIF OUT)	1104 µs
Analogue Inputs	4 balanced (Euroblock) and unbalanced (RCA Phono) channels connected in parallel
Selectable Input Sensitivity	+14 dBu, +4 dBu (default), -10 dBu, Dynamic Microphone
Maximum Input Level	+24 dBu (without clipping)
Digital Input	1 x S/PDIF stereo (RCA Phono connector)
Digital Output	1 x S/PDIF stereo (RCA Phono, default level -10 dB for daisy-chaining)
GPIO Control Interface	Euroblock (assignable for remote volume control, standby, mute, 12V trigger)
Network and Control Management	Ethernet RJ45 and Integrated Wi-Fi (configured via Inca Series Control Web App)
Power Supply	UREC™ universal mains switch mode power supply with Power Factor Correction (PFC) and standby converter
Operating Voltage / Frequency	Universal Mains 100V – 240V AC, 50 Hz – 60 Hz
Rated Power Consumption	700 W
Standby Power Consumption	< 0.5 W / < 500 mW (ErP compliance)
Idle Power Consumption	23.2 W @ 120 V (79 BTU) / 25.6 W @ 230 V (87 BTU)
Power Efficiency (at 1/8th full power into 2 ?)	66.6%

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it