

GP18

18" PASSIVE SUBWOOFER PA SYSTEM WITH 3-MODULE 8X2" K-ARRAY™ PAT® LINE-ARRAY COLUMN


Experience exceptional audio performance with the GP18 system, combining a powerful 18" passive subwoofer with a modular column line-array made up of 3 interchangeable modules featuring 8x2" drivers each, equipped with exclusive K-array™ PAT® (Pure Array Technology). The column is designed with alternating horizontal inclination of each driver, delivering a wide 140° horizontal coverage for an immersive sound stage. Perfect for low-impact indoor and outdoor events such as concerts, auditoriums, bars, and clubs, the GP18 system is suited for rental and permanent installations. Use it as a standalone system or in stereo with the GP18A, or boost its power further with GA43 and GA46 amplifiers for even more dynamic performance.



GP18

18" PASSIVE SUBWOOFER PA SYSTEM WITH 3-MODULE 8X2" K-ARRAY™ PAT® LINE-ARRAY COLUMN

HIGHLIGHTS

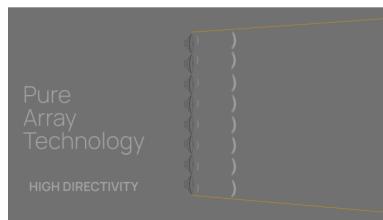

K-ARRAY™ PAT® TECHNOLOGY FOR FLAWLESS SOUND

The exclusive **K-array™ PAT® (Pure Array Technology)** transforms sound dispersion by delivering an exceptionally uniform and controlled audio output. This results in clear, precise, and immersive sound that fills any environment with superior audio quality.

RESISTANT AND VERSATILE (SAT IP54, SUB IP43)

The ABS casing of the satellite and the birch plywood SUB makes it suitable for indoor and outdoor installations, increasing the opportunities for use.



GP18

18" PASSIVE SUBWOOFER PA SYSTEM WITH 3-MODULE 8X2" K-ARRAY™ PAT® LINE-ARRAY COLUMN

PRODUCT DETAILS

KEY FEATURES

18" Passive Subwoofer + Column system ideal as extention of GP18A to obtain a stereo system

Trustability, high performances, low eye elegant design

Common Applications: Live music, Karaoke, DJ set, Wedding parties, intrattenimento in generale

SPECIFICATIONS

Type	Powered 18" sub + Column Speakers System
Transducers	SUB 18" woofer TOP 3 modules with 8x2" neodymium magnet drivers
Frequency Response	30Hz-20kHz (-6 db)
Max. SPL	125dB
Coverage	V. 20° H. 140°
Power handling	SUB
Impedenza nominale	SUB 8 ?, TOP 16 ?
Connectors	2x SpeakON NL4
Dimensions (WxHxD)	545 x 2230 x 600 mm
Weight	34.4 kg
Material	SUB Birch in Plywood, TOP in ABS
Color	Black
IP Rating	SUB IP43 TOP IP54