GS12

12" COMPACT HIGH-PERFORMANCE PASSIVE SUBWOOFER

GS12 is a high-performance 12" passive subwoofer, engineered for tight, deep bass in a compact format. Featuring a ferrite magnet and 3.5” voice coil, it combines power and clarity in a rugged birch plywood enclosure.

Small but mighty, GS12 delivers extended low-end down to 37 Hz and 122 dB max SPL, making it ideal for bars, restaurants, event spaces, houses of worship, or studios.

Perfectly matched with GH4 or GF82 speakers, and easily driven by GA43 or GA46 amplifiers, GS12 offers versatile, scalable performance for both fixed and mobile installations.

GS12

bb1fa4ed-1ffd-4683-9aa8-d457f0306e9e.png





Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GS12

12" COMPACT HIGH-PERFORMANCE PASSIVE SUBWOOFER

HIGHLIGHTS

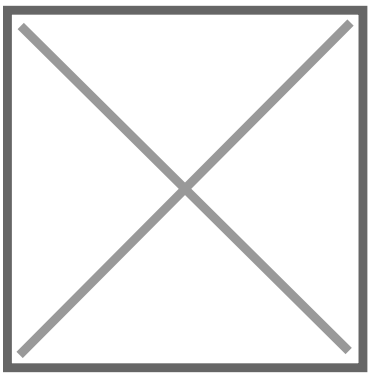

A COMBINATION OF HIGH POWER AND COMPACTNESS

The GS12 offers **1200W** of power in a **compact birch plywood cabinet**, with a frequency response down to **37 Hz**. This makes it perfect for those **seeking deep, controlled bass without sacrificing space and flexibility**, a definite advantage in fixed or mobile installations where size matters.

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GS12

12" COMPACT HIGH-PERFORMANCE PASSIVE SUBWOOFER

PRODUCT DETAILS

KEY FEATURES

Deep, controlled bass: thanks to the 12" woofer with ferrite magnet and 3.5" voice coil, the GS12 guarantees an extended frequency response up to 37 Hz, ideal for generating a powerful and precise sonic impact.

Birch plywood cabinet: the sturdy birch wood box ensures superior acoustic performance and durability over time, perfect for both fixed and mobile intensive use.

Full KGEAR System Compatibility: designed to integrate seamlessly with GH4/GF82 speakers and GA43/GA46 amplifiers, it makes it easy to create cohesive, high-performance audio systems.

Application versatility: with a small footprint and IP43, GS12 is perfect for bars, restaurants, places of worship, events and private studios, adapting to very different professional needs.

SPECIFICATIONS

Type	Passive subwoofer
Transducers	12” ferrite magnet woofer
Frequency Response	37Hz - 150Hz (-6dB)
Max SPL	122 dB
Rated Power	1200 W
Connectors	2x SpeakON NL4
Nominal Impedance	4 ?
Dimensions (W x H x D)	410x445x430 mm (16.1x17.5x17 in)
Weight	19 kg (41,89 lbs)
Material	Birch Plywood
Colors	Black

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GS12

12" COMPACT HIGH-PERFORMANCE PASSIVE SUBWOOFER

IP Rating	IP43
Coverage	Omni

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it