

GH4W

# 4" FULL RANGE ULTRA-COMPACT SOURCE SATELLITE PASSIVE SPEAKER (WHITE COLOR)


The **GH4** is a compact, high-performance satellite speaker designed to deliver clear and controlled sound reproduction in acoustically challenging environments. Equipped with a **4" full-range driver** featuring a **dual-coil neodymium magnet** and **selectable impedance (4? – 16?)**, it ensures powerful and accurate audio performance. The **cabinet design minimizes rear sound emission**, improving directivity and overall system efficiency. Its **stainless steel enclosure** with an **IP64 rating** guarantees durability and reliability even in demanding environments. Available in **passive or active versions (GH4A)**, the GH4 can be used as a **standalone speaker or in array configurations** for enhanced performance. It is ideal for fixed installations in professional settings such as **theaters, hospitality, retail, transportation, houses of worship, and residential environments**. Supplied with an **adjustable wall-mount bracket (GF-WALL)**, the GH4 offers a flexible and compact solution for high-quality audio system design.



GH4W

# 4" FULL RANGE ULTRA-COMPACT SOURCE SATELLITE PASSIVE SPEAKER (WHITE COLOR)

## HIGHLIGHTS

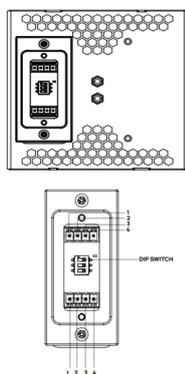

### SELECTABLE IMPEDANCE FOR GREATER INTEGRATION FLEXIBILITY

The GH4 allows you to choose between two selectable impedance levels (4 $\Omega$  – 16 $\Omega$ ) allowing its use in systems with few speakers as well as in more complex and multi-zone systems.

GH4W

# 4" FULL RANGE ULTRA-COMPACT SOURCE SATELLITE PASSIVE SPEAKER (WHITE COLOR)

## PRODUCT DETAILS

### KEY FEATURES

Compact design, high performance: 4" full-range driver with dual voice coil neodymium magnet, for powerful and defined sound output, in an extremely compact format.

Selectable impedance (4 $\Omega$  – 16 $\Omega$ ): allows flexibility of integration into systems with different configurations, simplifying the design of audio systems.

Reduced Rear Emission The optimised cabinet design reduces rear dispersion, improving sound directionality and reducing unwanted reflections.

Array capability: Can be configured in arrays to increase sound pressure and cover larger areas consistently.

Wall Mount Included: The GF-WALL swivel mount is included for easy and precise installation.

### SPECIFICATIONS

Type	Passive loudspeaker
Transducers	4" neodymium magnet full-range driver
Frequency Response	150 Hz - 20 kHz (-6dB)
Max SPL	122 dB
Rated Power	140 W
Coverage	V. 90°   H. 90°
Connectors	Phoenix connector (4-pin euroblock)
Nominal Impedance	4 $\Omega$ - 16 $\Omega$ selectable
Dimensions (W x H x D)	112x112x94 mm (4.41x4.41x3.70 in)
Weight	1,2 kg (2,65 lb)

GH4W

# 4" FULL RANGE ULTRA-COMPACT SOURCE SATELLITE PASSIVE SPEAKER (WHITE COLOR)

---

<b>Material</b>	Stainless steel
<b>Colors</b>	White
<b>IP Rating</b>	P64 (G-IPCAP1 accessory required)