
GF162T I

ULTRA-COMPACT 16X2" LINE ARRAY COLUMN SPEAKER WITH BUILT-IN TRANFORMER (BLACK)

The GF162T is a compact passive column speaker equipped with 16x2” ferrite drivers and a built-in transformer, specifically designed for high-voltage 70/100V systems. Powered by K-array™ Pure Array Technology (PAT®), it delivers precise coverage and long-throw performance in a discreet, low-profile format.

Ideal for distributed installations in spaces like hotels, restaurants, shops, public areas and residences, the GF162T combines the clarity and focus of a true line array with the simplicity of high-impedance connectivity.

Thanks to its rugged ABS cabinet, IP54 protection, and compact size, it is well-suited for indoor and outdoor use. For enhanced music performance, pair it with the GS6 subwoofer to create a balanced, full-range system.


9fa7b1f4-5ec9-4c11-929e-576686f06ac7.jpg

70V-100V Line


GF162T I

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GF162T I

ULTRA-COMPACT 16X2" LINE ARRAY COLUMN SPEAKER WITH BUILT-IN TRANFORMER (BLACK)

HIGHLIGHTS

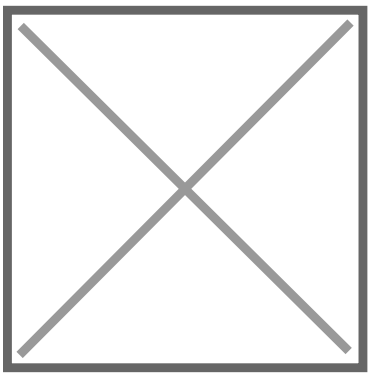


PURE ARRAY TECHNOLOGY (PAT®)

This technology enables **direct, intelligible and controlled sound**, even in reverberant or complex environments, **without the need for large spaces or bulky loudspeakers**.

ULTRA-COMPACT FORMAT AND IP54 RATING FOR DISCREET INDOOR/OUTDOOR INSTALLATIONS


Just 60 mm wide, with dust and splash protection—perfect for elegant applications in both public and private venues.

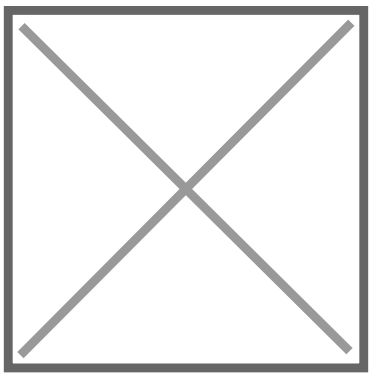

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GF162T I

ULTRA-COMPACT 16X2" LINE ARRAY COLUMN SPEAKER WITH BUILT-IN TRANFORMER (BLACK)

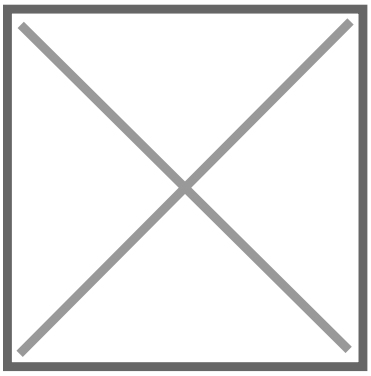

INTEGRATED TRANSFORMER FOR MAXIMUM FLEXIBILITY

70/100V compatibility with **multi-tap power selection** (2/4/8/16W @100V – 1/2/4/8W @70V), for flexible multi-zone integration.

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GF162T I

ULTRA-COMPACT 16X2" LINE ARRAY COLUMN SPEAKER WITH BUILT-IN TRANFORMER (BLACK)

PRODUCT DETAILS

KEY FEATURES

- Lightweight construction and IP54: ideal for indoor and outdoor environments.
- 16 2” in-line drivers: Superior audio performance in a slim, compact body.
- Selectable power up to 400W: adaptability to environments of different scales.

SPECIFICATIONS

Type passive loudspeaker	
Transducers	16x2” ferrite magnet woofer
Frequency Response	135 Hz - 20 kHz (-6dB)
Max SPL	115 dB
Rated Power	8/16/32/64W @100V 4/8/16/32W @70V
Coverage	V. 7° | H. 90°
Connectors	Phoenix connector (5-pin euroblock)
Dimensions (W x H x D)	60 x 1200 x 66 mm (2,36 x 47,24 x 2,56 in)
Weight	4,2 kg (8,05 lbs)
Material	ABS
Colors	Black
IP Rating	IP54

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it