DJM-V5

COMPACT 3-CHANNEL DJ MIXER

DJM-V5

This new mixer is inspired by the design philosophy of the DJM-V10, the professional six-channel DJ mixer used at festivals and clubs around the world, renowned for its exceptional sound quality and precise mixing performance that make it a favourite among DJs.

The DJM-V5 takes the essence of the DJM-V10 and condenses it into a more compact 3-channel unit. While physically smaller, it offers vast potential for creative mixing without compromise, even in DJ booths with limited space. You can utilise a range of more sophisticated effects, including updated filters and Send FX, to express yourself when playing with the DJM-V5 in any performance situation. And the built-in SonicLink transmitter, which uses AlphaTheta's exclusive ultra-low latency wireless technology, allows you to perform with greater freedom. Simply pair up your HDJ-F10 headphones and you can monitor your music wirelessly with minimal latency, opening up new possibilities for enjoying a complete and flexible mixing environment.

With its essential layout and refined features packed into a compact unit, the DJM-V5 brings precise sound control and creative performance capabilities wherever you choose to play.

f011f6de-ef02-4167-9ac0-f9a241deb0b8.jpg

b1d49149-1b15-4717-a5bf-f465c46c77dd.jpg

6e3c4882-b7ef-4c73-a77e-7d88f714

a78808f8-b079-4a5f-9d06-577012a42829.jpg


6ed1bab5-27ae-4a3e-a49a-a4e116582c94.jpg

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

DJM-V5

COMPACT 3-CHANNEL DJ MIXER

HIGHLIGHTS

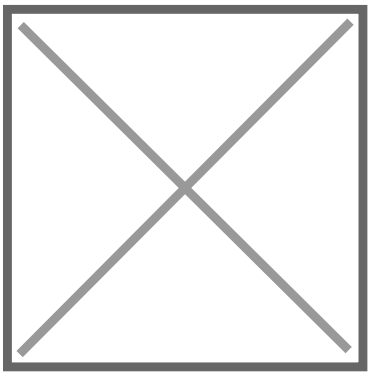


SMOOTH MIXING IN A COMPACT DESIGN

Mix intuitively and creatively on the 3-channel DJM-V5, even in DJ booths with limited space. The mixer inherits the layout, tactile feel, and many features of the DJM-V10 – including the 4-band EQ, compressor, filter, and Send FX – but has a 30% smaller footprint. You can precisely control levels with the 60-mm longthrow channel faders from the DJM-V10-LF with Soft Mix Curve for subtle high-frequency attenuation to create smoother, more natural blends.

HIGH-RESOLUTION, WARM SOUND QUALITY


Building on the acclaimed high-resolution warm sound of the DJM-V10, the DJM-V5 delivers well-balanced mixing that avoids sonic saturation – even when you layer multiple audio sources. It features studiograde 96 kHz / 64-bit mixing DSP processing, with high-quality 32-bit A/D and D/A converters from ESS. Technology built into the channel input and master output sections.

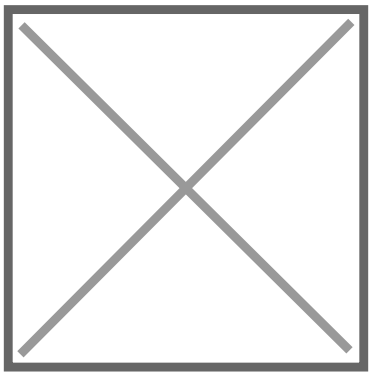

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

DJM-V5

COMPACT 3-CHANNEL DJ MIXER

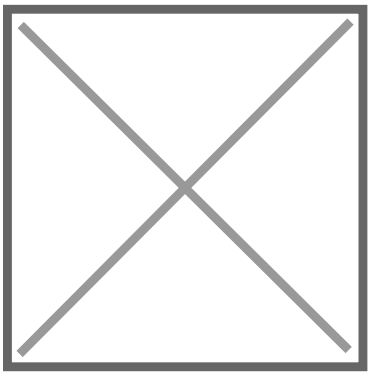



CREATIVE FREEDOM WITH A VARIETY OF EFFECTS

Add texture to your music with 6 types of expressive Send FX: Short Delay, Reverb, Shimmer, Tape Echo, PingPong, and Echo-Verb. Each channel features a dedicated send knob so you can intuitively adjust the amount of effect applied to individual tracks. There's also a dedicated fi lter knob on every channel with 3 selectable modes: low-pass, high-pass, and the newly added cross-pass.

BUILT-IN SONICLINK TRANSMITTER

The DJM-V5 is the fi rst mixer to feature a built-in SonicLink transmitter, enabling comfortable, low-latency wireless monitoring when paired with compatible headphones.

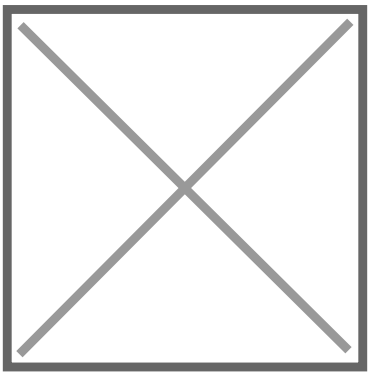

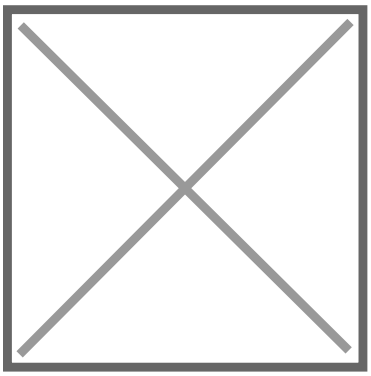

PRO DJ LINK SUPPORT

By connecting the DJM-V5 to compatible DJ players – such as the CDJ-3000X or CDJ-3000 – and rekordbox via PRO DJ LINK, you can apply effects precisely in time with the BPM and use Link Cue. And you have the option to load your personal mixer settings from a USB device or rekordbox in an instant.


Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

DJM-V5

COMPACT 3-CHANNEL DJ MIXER

EXTENSIVE CONNECTIVITY

Connect the rear USB Type-C terminal to a PC/Mac running rekordbox for Mac/Windows or Serato DJ Pro*1 and use features such as DVS control. The multi-device compatible MULTI I/O also features a toppanel USB Type-C port so you can connect an iPhone or iPad*2 to use DJM-REC or RMX-1000 for iPad, or connect the RMX-IGNITE with a single USB cable. The unit also supports insert connections with an external effector via USB send/return.

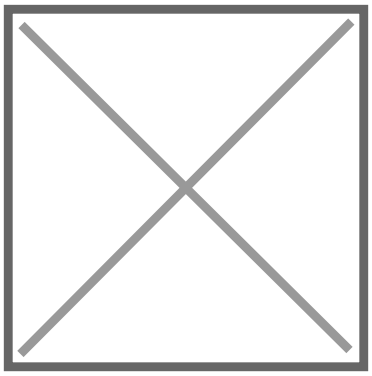

*You’ll need a separate license to use Serato DJ Pro.

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

DJM-V5

COMPACT 3-CHANNEL DJ MIXER

PRODUCT DETAILS

KEY FEATURES

- Compact design: same feeling of the DJM-V10 but 30% smaller,
- High-resolution sound featuring studio-grade 96 kHz / 64-bit mixing DSP processing with high-quality 32-bit A/D and D/A converters.
- 3 selectable filter modes for each channel.
- Extensive compatibility thanks to multi Input/Output ports.
- Dedicated Send FX knob for each channel.

SPECIFICATIONS

Compatible Software	Rekordbox (Mac/Win) | Serato DJ Pro (license required)
Frequency Response	20Hz - 40kHz (LINE)
S/N Ratio	110 dB (USB), 105 dB (LINE), 88 dB (PHONO), 79 dB (MIC)
Total Harmonic Distorsion	0,005% (LINE-MASTER)
Inputs	x3 RCA (LINE), x3 PHONO (RCA), 1x SEND (1/4" TS Jack connector), x1 MIC (XLR connector and 1/4" TRS Jack)
Outputs	x1 MASTER (XLR), x1 BOOTH (1/4" TS Jack connector), 1x SEND (1/4" TS Jack connector), x1 HEADPHONES OUT (1/4" TRS Jack connector), x1 HEADPHONES OUT (1/8" TRS Jack connector), x1 REC (RCA)
DATA Connectors	2x USB TYPE-C, 1x LAN (LINK)
SonicLink (Headphones Output)	2.4 GHz Frequency Band
Dimensions (W x D x H)	11.89” x 17.22” x 4.25” in (302,0 x 437,5 x 107,9 mm)
Weight	17.6 lb (8,0 kg)

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

DJM-V5

COMPACT 3-CHANNEL DJ MIXER

Accessories	Power cable, Quick Start Guide, Precautions for use, Warranty (for certain areas)
Color	Black

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it