

XPRS-1152S

15" REFLEX LOADED ACTIVE SUBWOOFER

Versatile XPRSion

The XPRS2 Series couples the versatility and mobility of the original XPRS Series with elevated sound-performance and audio intelligibility to deliver a high-caliber speaker system for mobile DJs, live sound, houses of worship, rental and fixed installations.

XPRS-1152S

ee6d9d01-92a5-4f3d-85bf-09749f6247eb.jpg

ff2246ba-ccb-4b1a-9a78-4aa699b6c169.png

896b3ead-652b-49da-8801-d08465

ea4957c6-117f-43f3-8e91-74bb5454017d.png


0376ee89-3983-4f27-9944-e7e7a6e8b5ed.png

ab053727-c24d-413a-97af-db164

XPRS-1152S

15" REFLEX LOADED ACTIVE SUBWOOFER

HIGHLIGHTS

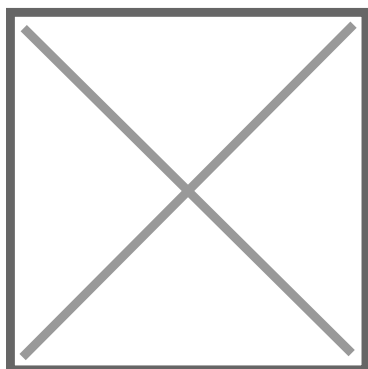


POWERFUL CLASS D AMPLIFICATION

The **XPRS2** Series employs **Class D** Amplification with high output wattage for a powerful and premiere audio experience for performers and listeners alike. The XPRS102 and XPRS122 full-range speakers feature Class D 2000 W amplification, while the XPRS1152S and XPRS1182S subwoofers offer Class D 4000 W amplification.


HIGH QUALITY, ROBUST BUILD

Pioneer DJ's all-new XPRS2 Series features a sleek all-black, protective pollywood cabinet for performance in harsh outdoor and indoor environments. The series models all come with a durable handle to support system portability and handling during setup and take down. The XPRS2 Series also features rubber feet to create separation and shock absorption between surfaces.

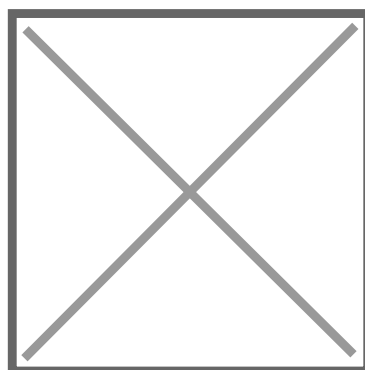

XPRS-1152S

15" REFLEX LOADED ACTIVE SUBWOOFER

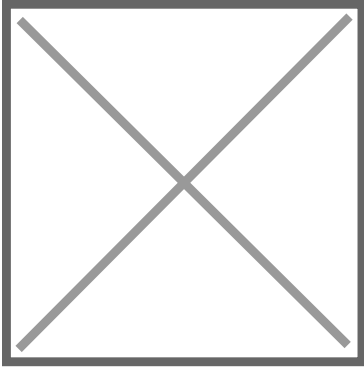

THREE DSP MODES

Both of the XPRS2 subwoofers contain three different DSP preset modes—Boost, Extended LF, and Normal—to suit different listening environments.

XPRS-1152S

15" REFLEX LOADED ACTIVE SUBWOOFER

PRODUCT DETAILS

KEY FEATURES

Powerful Class D Amplification

High Quality, Robust Build

Three DSP Modes

Accurate Audio Performance / Frequency Response

SPECIFICATIONS

Type	15 inch active subwoofer
Amplifier Output	Class D 4000W peak
Supported voltages	110 V to 240 V (50 Hz/60 Hz)
Power consumption	800 W
Frequency Range	45 – 120 Hz
DSP modes	EQ Mode Select - 3 DSP Preset Modes(Switch), LPF, POLARITY
DSP presets modes	BOOST, EXTENDED LF, NORMAL
Maximum Sound Pressure	129 dB
Inputs	Left Mono (Combo), Right (Combo)
Outputs	Left Mono (XLR), Right (XLR)
Driver	15" ferrite LF cone driver
Finish	Black paint, Rubber feet
Handle	2 metal handles (on left side and top)
Pole socket	35 mm socket
Enclosure	Plywood (TSCA)

XPRS-1152S

15" REFLEX LOADED ACTIVE SUBWOOFER

Amplifier Protection	Thermal limiting, Digital compressor
Driver Protection	Short circuit protection
Power unit Protection	Primary AC mains overcurrent protection, Primary AC mains overvoltage protection
Dimensions (WxHxD)	580x450x503 mm
Weight	26.3 kgs
What's in the box	XPRS1152S x 1 (not sold as a pair), Powerd cord, Quick start guide, Important Safety Precautions