

MA100

PREAMPLIFIER FOR DYNAMIC AND RIBBON MICROPHONES

In the wide range of microphone accessories, MAONO includes the MA100 preamplifier for dynamic and ribbon microphones.

MA100

The MA100 is very useful when there is no way to drive a dynamic or ribbon microphone well directly using a normal audio interface as the sound would still be too low.

Using the MA100 microphone preamplifier, you will get a clean and constant 30dB gain without distortion thus emphasizing the clarity and character of the output sound.

MA100 can be used in various fields of application such as professional audio studios, podcasts and live streaming.

The elegant finish, portable size and solid construction are other features that contribute to the high quality of the MA100.

8989317c-bf52-4c12-bc3e-594949ebbdd3.jpg

f54dae34-3201-48aa-b669-2525ae514bd9.jpg

7df25202-6c60-45dc-9953-2a21fd

MA100

PREAMPLIFIER FOR DYNAMIC AND RIBBON MICROPHONES

HIGHLIGHTS



MIC GAIN 30DB

Using the MA100 microphone preamplifier, you will get a clean and constant 30dB gain without distortion thus emphasizing the clarity and character of the output sound.

CONNECTION TO PHANTOM POWER +48V

The MA 100 microphone preamplifier can be connected to devices that supply +48V phantom power without problems



MA100

PREAMPLIFIER FOR DYNAMIC AND RIBBON MICROPHONES




COMPACT AND PORTABLE

MA100 comes with an elegant finish, solid construction and dimensions that allow for easy portability.

VARIOUS FIELDS OF APPLICATION

MA100 is a versatile device so that it can be used in various fields of application such as professional audio studios, podcasts and live streaming.

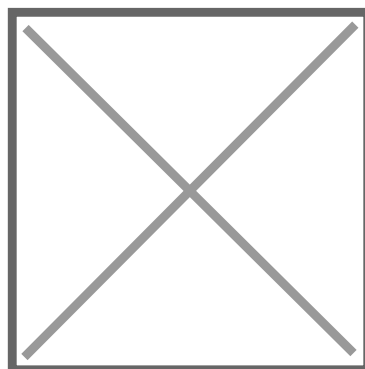

MA100

PREAMPLIFIER FOR DYNAMIC AND RIBBON MICROPHONES

PRODUCT DETAILS

KEY FEATURES

Provides clean and consistent 30dB gain with no distortion

Ensures clear sound of dynamic microphones

Premium finish, portable size, and solid build

SPECIFICATIONS

Maximum Output Level	15V,rms at 1Khz, 100KOhm Load, THD+N < 1%
Gain	30dB at 1Khz, 10KOhm Load
Frequency Response	20Hz – 20kHz (+0,5dB, -1dB)
Total Harmonic Distortion + Noise	<0,01% at 1Khz, 100KOhm Load, -40dBu Input
Signal to noise ratio	118dB at 1Khz, 100KOhm Load, THD+N = 1%
Intermodulation Distortion	<0,1% at 1Khz, 100KOhm Load, -30dBu Input
Output impedance	11KOhm at 1Khz +/- 30%
Current consumption	5mA at 48V, TYP
Dimensions (W x D x H)	106 x 42 x 47 mm
Weight	0,294 Kg
Package Dimensions (W x D x H)	137 x 71 x 65 mm
Package Weight	0,4 Kg