

GC5-RNB

5.25" PASSIVE CEILING/WALL-MOUNTED SPEAKER (ROUND GRILLE, BLACK)


The GC5 is a 2-way passive in-wall or in-ceiling speaker, ideal for both residential and professional settings. Featuring a 5.25" coaxial woofer and a 0.75" titanium dome tweeter, it delivers natural, balanced sound with a 70 Hz–20 kHz frequency range, 130° coverage, and SPL up to 109 dB.

Its compact design and paintable magnetic grille (round or square) allow seamless integration in homes, hotels, bars, offices, or other public spaces.

Based on the infinite baffle principle, it works without a back box and is ideal for drywall, wood, or tile installations. With just 75 mm depth and a weight of 1.08 kg, it ensures easy mounting and strong performance. Its 8-ohm impedance makes it suitable for compact hi-fi systems.

The GC5 pairs perfectly with KGEAR amplifiers and subwoofers such as the GC8S or GS6, offering a complete and scalable solution for discreet yet powerful audio setups.

GC5-RNB



Coaxial Speaker Frameless Low Impedance 2-Way Speaker

GC5-RNB

5.25" PASSIVE CEILING/WALL-MOUNTED SPEAKER (ROUND GRILLE, BLACK)

HIGHLIGHTS




ADJUSTABLE TWEETER FOR CUSTOMIZED LISTENING

The RN (round) version of the GC5 integrates an adjustable tweeter, which allows you **to precisely direct the high frequencies towards the listening area**, for a sound that is always clear and detailed, even in irregular environments or with unconventional configurations. A rare feature in in-wall speakers, which transforms architectural integration into a tailor-made audio experience.

FRAMELESS DESIGN FOR SEAMLESS ARCHITECTURAL INTEGRATION

The grille with no visible frame allows the GC5 to virtually disappear after installation, delivering a clean, minimalist aesthetic—ideal for refined interiors or design-sensitive environments.

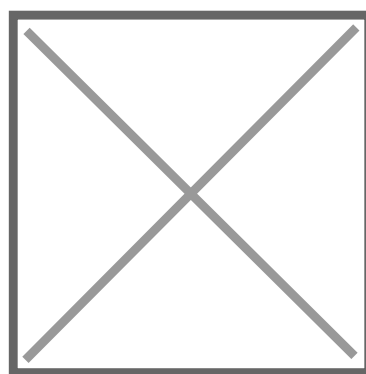

GC5-RNB

5.25" PASSIVE CEILING/WALL-MOUNTED SPEAKER (ROUND GRILLE, BLACK)

PRODUCT DETAILS

KEY FEATURES

High-performance coaxial system: 5.25" woofer with ferrite magnet and 0.75" titanium dome tweeter, for detailed, natural and balanced audio reproduction across the entire frequency range.

Wide sound coverage (130°): ensures uniform sound dispersion, ideal for medium to large sized residential or commercial environments.

High sound pressure (SPL max 109 dB): offers power and clarity even in installations where a large listening area is required.

Infinite Baffle Design: Optimized for installation in drywall, wood or other building materials without the need for a back box, for maximum simplicity and acoustic consistency.

SPECIFICATIONS

Type	Passive loudspeaker
Transducers	5,25" coax ferrite magnet woofer 0,75" titanium dome tweeter
Frequency Response	70 Hz - 20 kHz (-10dB)
Max SPL	109 dB
Rated Power	80 W
Coverage	130°
Connectors	Spring terminals
Nominal Impedance	8 ?
Dimensions (W x H x D)	196x179x75 mm (7.7x7x3 in)
Weight	1.08KG (2.4lbs)
Material	ABS

GC5-RNB

5.25" PASSIVE CEILING/WALL-MOUNTED SPEAKER (ROUND GRILLE, BLACK)

Colors

Black