NCO-2


DRIVE CORE DELUXE MKII


The NUX DRIVE CORE DELUXE MKII (WASABI DRIVE) is an overdrive pedal that combines **8 distinct circuits**, offering a wide range of tones. From the iconic Texas Blues to the Nashville Overdrive, you can effortlessly dial in your perfect drive sound using the intuitive rotary knob.


By holding the footswitch, you can engage or disengage the **Post Boost**, adding up to **7dB** of gain, making it ideal for solos without the need for an additional boost pedal.

The DRIVE CORE DELUXE MK II features a **100% pure analog circuit** with 8 distinct TS-style sounds, effortlessly switched via high-quality relay circuitry, ensuring no loss of tone and achieving a perfectly authentic sound reproduction.

NCO-2


7b2a19bb-0ce6-4110-8f02-0f990aeb3f64.jpg


b89d3aad-15b0-4c15-a33f-cfa686328abf.jpg



2ccd81b1-2d0b-4f08-ad48-c25d024b

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

NCO-2

DRIVE CORE DELUXE MKII

HIGHLIGHTS

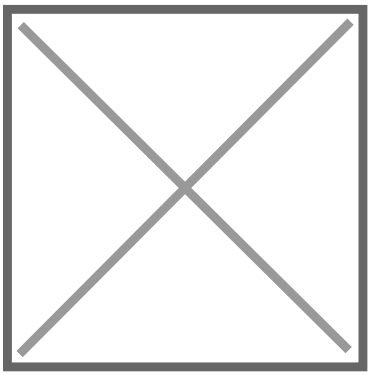


8 ICONIC DRIVE CIRCUIT IN ONE PEDAL

8 distinct circuits, offering a wide range of tones. From the iconic Texas Blues to the Nashville Overdrive, you can effortlessly dial in your perfect drive sound using the intuitive rotary knob.

BOOST YOUR SOLOS


By holding the footswitch, you can engage or disengage the Post Boost, adding up to 7dB of gain, making it ideal for solos without the need for an additional boost pedal.

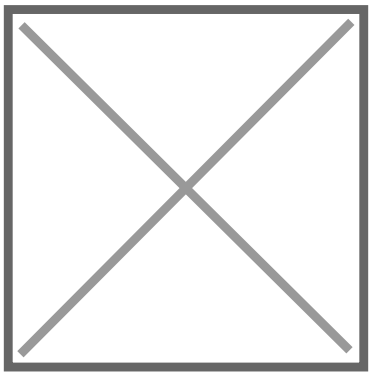

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

NCO-2

DRIVE CORE DELUXE MKII

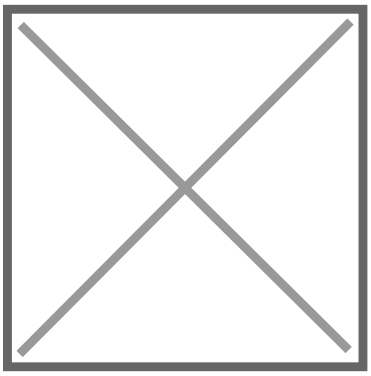

100% ANALOG CIRCUIT AND LOSSLESS TONE SWITCHING

The DRIVE CORE DELUXE MK II features a 100% pure analog circuit with 8 distinct TS-style sounds, effortlessly switched via high-quality relay circuitry, ensuring no loss of tone and achieving a perfectly authentic sound reproduction.

PRODUCT DETAILS

KEY FEATURES

100% analog circuits with digital switching rotary knob
True bypass
8 iconic drive circuit in one pedal
Holding FS to engage/disengage the Post Boost

SPECIFICATIONS

Input impedance	500k?
Output impedance	820?
Power	9V DC (Negative tip, Optional ACD-006A adapter)
Current Draw	35mA
Dimensions	122mm(L) x 72mm(W) x47mm(H)
Weight	270g

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it