GH412


TWO-WAY PASSIVE COAXIAL ARRAY MODULE WITH 4 X 12’ COAXIAL WOOFERS, 800 W, 8 ?


The GH412 is a high-efficiency passive coaxial array module, inspired by K-array's iconic KH7, combining powerful output, directional control, and a compact format. With K-array™ SAT® (Slim Array Technology) and PAT® (Pure Array Technology), GH412 achieves a cardioid dispersion that minimizes unwanted energy projection and enhances clarity in complex acoustic spaces.


Equipped with four 12” coaxial drivers, each with a 1” compression driver, it delivers deep, powerful, and uniform sound, ideal for live events, stadia, auditoriums, and outdoor installations. Its IP54 stainless steel cabinet ensures long-lasting weather resistance.

Designed to operate in vertical arrays, the GH412 offers system scalability, providing a flexible solution for professional setups that demand high performance and wide-area coverage. Compatible with GA43 and GA46 recommended amplifiers.

GH412


0d04eae0-90e0-44e1-a4da-ac90b5a37cb9.png


722dfca2-f20f-4375-ae39-05894345cf44.png


5938315e-1ffa-4d03-bbc3-1d19c7

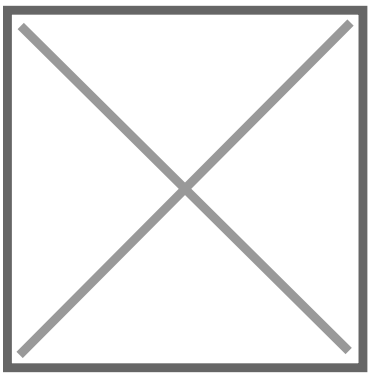
2-Way Speaker Coaxial Speaker

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GH412

TWO-WAY PASSIVE COAXIAL ARRAY MODULE WITH 4 X 12’ COAXIAL WOOFERS, 800 W, 8 ?

HIGHLIGHTS

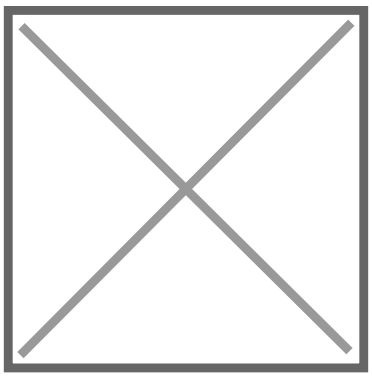


SAT® AND PAT® TECHNOLOGIES PROVIDE ULTRA-PRECISE CARDIOID DISPERSION AND UNIFORM SOUND, EVEN IN ACOUSTICALLY COMPLEX SPACES

With **K-array’s SAT® and PAT® technologies**, GH412 provides **precise cardioid coverage (30° V, 90° H)**, minimizing unwanted sound spill and ensuring **uniform audio in complex environments** like stadiums or auditoriums.

STAINLESS STEEL ENCLOSURE WITH IP54 RATING FOR PROFESSIONAL OUTDOOR/INDOOR USE

Durable and weather-resistant design, perfect for live events and permanent installations in challenging environments.



Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GH412

TWO-WAY PASSIVE COAXIAL ARRAY MODULE WITH 4 X 12’ COAXIAL WOOFERS, 800 W, 8 ?

PRODUCT DETAILS

KEY FEATURES

- Designed for high performance applications
- High efficiency in a compact box
- Weather resistant

SPECIFICATIONS

Type	Passive line array loudspeaker
Transducers	4x 12” coaxial woofer with 1” compression driver
Continuous Power	800W
Peak Power	1600W
Impedance	8?
Frequency range	125hz – 20khz (-6db average)
Maximum SPL	140dB (peak)
Coverage	V.30° - H.90°
Connectors	SpeakOn NL4 1+ 1- (signal); 2+ 2- (through)
Dimensions WxHxD	327mm x 1290mm x 198mm
Weight	55.2Kg
Material	stainless steel
Color	Black
IP Rating	IP54

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it