

B-10 VLOG

2.4 GHZ WIRELESS LAVALIER SYSTEM

NUX B-10 Vlog is a compact and lightweight wireless microphone system, consisting of a receiver and a transmitter, which can achieve a wireless distance of up to 30 meters. NUX B-10 can provide a stable wireless connection, record high-quality, low-noise, low-latency audio.

It's compatible with most existing cameras/mobile phones/tablets. And it's a solution for Vlog shooting, product evaluation, event speeches, live broadcasts and web conferences.

B-10 VLOG

90848336-140f-47a9-95c4-44e8c9f3d6d9.jpg

92c53a6a-5ad7-415e-9351-10977a5848e6.jpg

3443b77d-dc7d-4209-9625-b4958

9e32f082-4939-453d-9557-7cae3c88cf7d.jpg

5319e732-4f4b-43f0-b68c-98e515c2beb1.jpg

81efe9b2-c849-419d-a58f-4ec2b9b

632f0219-e39c-444e-a135-9c1d2cac0d8e.jpg

325de605-19ab-484b-a487-1c7d91c9d3b0.png

c65a9234-13b6-4270-829e-717a

B-10 VLOG

2.4 GHZ WIRELESS LAVALIER SYSTEM

HIGHLIGHTS




HI QUALITY AUDIO TRANSMITTING

B-10 Vlog equips a high-quality omnidirectional microphone unit, which can pick up sounds from different directions. It makes 44.1Khz/24bit high-quality recording with latency as low as 5ms and intelligent noise reduction. It ensures the sound and video are synchronized. The transmitter has a 3.5mm TRS input for external lavalier microphone. A knob-style fur windscreen are also provided to dampen wind noise in windy outdoor weather conditions for extremely clear, professional sound in any situation.

STABLE WIRELESS CONNECTION

NUX B-10 Vlog features universal 2.4GHz digital transmission technology, and the transmission distance is up to 30 meters. Whether in dense urban environments, shopping malls or offices, whether shooting indoors or outdoors, the B-10 Vlog can provide you with stable and reliable wireless audio transmission.

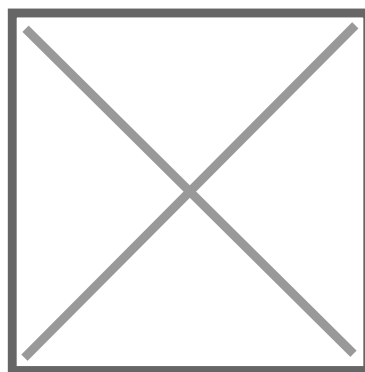

B-10 VLOG

2.4 GHZ WIRELESS LAVALIER SYSTEM





COMPACT SIZE, LIGHT WEIGHT

The transmitter of the B-10 Vlog features a clip-back design, which can be easily fixed on clothing. The receiver can be installed on the cold/hot shoe of the camera with the help of the hot shoe conversion plate, which maximizes the expandability of the camera. The transmitter and receiver are both less than 30 grams, exquisite and compact, and hardly occupy the space of the camera bag.

HIGH-DEFINITION OLED DISPLAY

B-10 Vlog has a built-in high-definition OLED display, and with the optimized UI design, it clearly displays the current working status of the wireless connection, which is convenient for shooting.

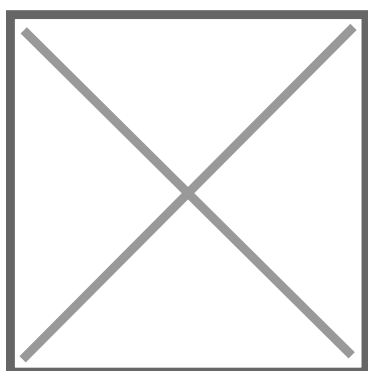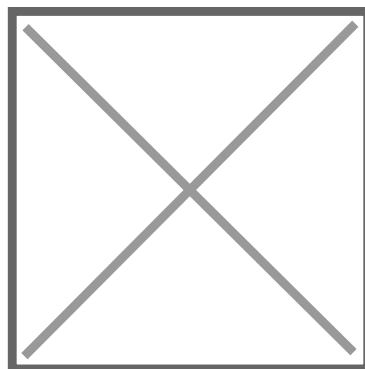

LONG BATTERY LIFE

The battery life of the B-10 Vlog can be up to 4 hours for the transmitter and 6 hours for the receiver. It comes with a USB-C Y-cable, you can charge the transmitter and receiver at the same time.


B-10 VLOG

2.4 GHZ WIRELESS LAVALIER SYSTEM

ACCESSORIES INCLUDED

All you need is in the package:

- 1 x fur windshield
- 1 x USB-C Y-cable
- 1 x TRS(female) to TRRS(male) adaptor cable for Mobile Phone(CTIA)
- 1 x 3.5mm TRS cable for RX to Camera
- 1x 3.5mm TRS Y-cable for 2 RXs to Camera
- 1 x Cold-shoe RX mount

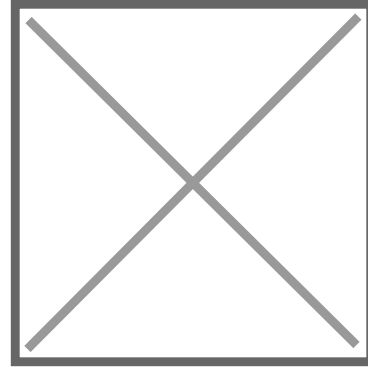

B-10 VLOG

2.4 GHZ WIRELESS LAVALIER SYSTEM

PRODUCT DETAILS

KEY FEATURES

2.4GHz 44.1Khz/24bit High-quality Audio Transmitting and ultra Low Latency ensure perfect sync

Stable Wireless Connection up to 30 meters

Multi-level Gain Control can be adjusted in 5 steps from -12dB to +12dB, helping you to record more sound details

Quick Match: receiver and transmitter are already paired

Ultra compact and light: bring it anywhere

High-definition OLED display

Long life battery: 4 hours for the transmitter, 6 hours for the receiver

Included Accessories: 1 x fur windshield, 1 x USB-C Y-cable, 1 x TRS (female) to TRRS(male) adaptor cable for Mobile Phone (CTIA), 1 x 3.5mm TRS cable for RX to Camera, 1x 3.5mm TRS Y-cable for 2 RXs to Camera, 1 x Cold-shoe RX mount

SPECIFICATIONS

Operating Frequency Band	2.4 GHz
Operation Length	< 100 feet (30m)
Sampling Rate	24bit / 44.1 kHz
Frequency Response	50Hz-20kHz
Latency	< 5ms
Dynamic Range	96dB
Microphone on TX	Omnidirectional Electret Condenser Microphone
Maximum Sound Pressure Level	110dB SPL
Dimensions (TX/RX) 51 mm(L) × 42mm(W) x 13mm(H)	
Weight (TX/RX)	28 g each