

## M-LINER 1040-SET

# 4 X BEAM MOVING BAR 10 X 40 W LED WITH PIXEL CONTROL

---

### M-LINER 1040-SET

The **M - Liner 1040** is an ultra high power LED based moving head beam bar with smart and compact stylish fireproof housing with a smooth, fast and quiet TILT movement. The beam angle is 2° for each LED with sharp beam effect. It features 10\*40W 4-in-1 RGBW LED sources with pixel mapping capability which not only allows you to create an endless range of color variations, but also to use each LED of the array as a pixel in order to draw all kinds of graphic images that change dynamically both in shape and color. It provides variable speed shutter/strobe effect, virtual color macro effect, dynamic patterns, static patterns to its users for easy operation. It comes with kinds of DMX channel profiles. The M - Liner 1040 supports DMX, RDM (Remote Device Management).

The fixture's exterior housing is beautifully balanced basing on a modern design philosophy with supremely harmonious interior structure for remarkable control. The sculpted body of the **M - Liner 1040** achieves more than just a striking look. The 2\*1/4 turn fastening omega clamps, available for vertical and horizontal plug-in, make installations fast and easy. It's applicable for large scale live concerts, TV productions, road shows, clubs, etc.

[5fde3501-bd3a-4047-bf2f-fe2ab04155ec.jpg](#)

[fdc456a4-bd06-4eb0-ab12-c02f35645b30.jpg](#)

[d3915386-4d39-4247-90f1-75f71af8](#)

RGBW 4in1 LED Technology 2° Beam Angle Flicker-Free Operation Fan Controlled by Processor DMX-512 Control

M-LINER 1040-SET

## 4 X BEAM MOVING BAR 10 X 40 W LED WITH PIXEL CONTROL

---

### HIGHLIGHTS


---



PIXEL MAPPING CAPABILITY

---

270° SMOOTH, FAST AND PRECISE  
RESOLUTION FOR TILT MOVEMENT WITH  
LOW NOISE OPERATION

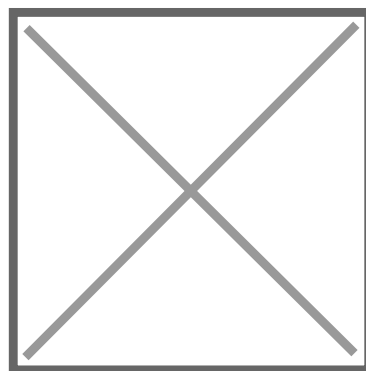

M-LINER 1040-SET

## 4 X BEAM MOVING BAR 10 X 40 W LED WITH PIXEL CONTROL

---



2,° BEAM ANGLE

# M-LINER 1040-SET

## 4 X BEAM MOVING BAR 10 X 40 W LED WITH PIXEL CONTROL

### PRODUCT DETAILS

#### KEY FEATURES

10 x 40W high efficiency 4-IN-1 RGBW LED Life Span: 50000H

2,° Beam Angle

0-100% Smooth linear LED dimming with fine control

0-20Hz high speed strobe effect with variable speed

Sophisticated 4 colors RGBW mixed

Pixel mapping capability with each LEDs controllable individually

Sharp beam effect

Preset color macros and patterns with variable speed

Preset foreground color options for patterns

Flicker free operation for broadcast TV and FILM

TILT movement: 230°(8/16 bit), photoelectric reset and automatic error correction

DMX512 with RDM / Master-Slave / Auto / Sound modes

High Efficient low noise self adjusting fan cooling system

#### SPECIFICATIONS

|                   |                                          |
|-------------------|------------------------------------------|
| Lamp              | 10 x 40W high efficiency 4-IN-1 RGBW LED |
| LED life          | 50000 hours                              |
| Input voltage     | AC100-240V 50/60Hz                       |
| Power consumption | 960W                                     |

# M-LINER 1040-SET

## 4 X BEAM MOVING BAR 10 X 40 W LED WITH PIXEL CONTROL

|                                     |                                                                       |
|-------------------------------------|-----------------------------------------------------------------------|
| <b>Control Mode</b>                 | DMX512, Master/slave, Sound, Auto Mode, RDM                           |
| <b>DMX Channel Modes</b>            | 7/13/43 Channel                                                       |
| <b>Beam angle</b>                   | 2°                                                                    |
| <b>Dimmer</b>                       | 0-100% Smooth linear LED with ?ne control                             |
| <b>Focus</b>                        | High resolution motorized                                             |
| <b>Scan</b>                         | Smooth, fast and precise resolution for TILT movement 270° e 16Bit    |
| <b>Strobe</b>                       | 0-25T/sec high speed                                                  |
| <b>Display</b>                      | LED display with 4 control buttons                                    |
| <b>Colors</b>                       | Sophisticated 4 colors RGBW mixed                                     |
| <b>Pixel mapping</b>                | available with each LEDs controllable individually                    |
| <b>Preset</b>                       | color macros, patterns, foreground and Background with variable speed |
| <b>Lense</b>                        | high efficiency acrylic                                               |
| <b>Housing</b>                      | Flame-retardant plastic and Alluminium                                |
| <b>Internal Running Temperature</b> | 0 ÷ 40°C                                                              |
| <b>Dimensions (WxDxH)</b>           | 1000(W) * 283.7(D) * 230(H)mm                                         |
| <b>Weight</b>                       | 13.6 kg                                                               |
| <b>Package Dimensions (WxDxH)</b>   | 590(W) * 1170(D) * 435(H)mm                                           |
| <b>Package Weight</b>               | 81.9 kg                                                               |