GF82W I

ULTRA-COMPACT 8X2’ PASSIVE COLUMN LOUDSPEAKER WITH K-ARRAY™ PAT® TECHNOLOGY, 200 W, 16 ? (WHITE)

The GF82 I is an ultra-compact passive line array column speaker equipped with eight 2" drivers and designed to deliver high-performance audio in a discreet and space-saving design. Leveraging K-array™ PAT® (Pure Array Technology), it provides tight dispersion control and consistent long-throw coverage.

Its sleek, low-profile design integrates seamlessly into any setting, while the IP54-rated ABS enclosure ensures reliability in both indoor and outdoor installations. With 200 W power handling and selectable impedance (16–64 ?), the GF82 I is a versatile solution for hotels, restaurants, transportation hubs, conference spaces, and more.

It can be paired with the GS6 subwoofer for enhanced low-frequency response, making it the perfect choice for professionals seeking compact, high-quality sound.

8414af41-dd46-4c6b-9932-17a6b3af7a29.png


GF82W I

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GF82W I

ULTRA-COMPACT 8X2’ PASSIVE COLUMN LOUDSPEAKER WITH K-ARRAY™ PAT® TECHNOLOGY, 200 W, 16 ? (WHITE)

HIGHLIGHTS

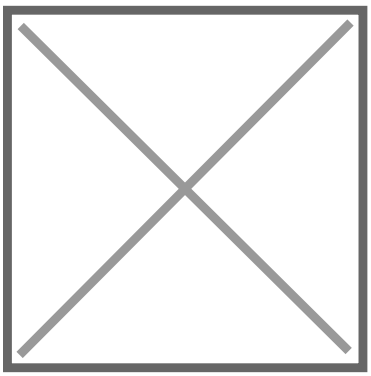


PURE ARRAY TECHNOLOGY (PAT®)

This technology enables **direct, intelligible and controlled sound**, even in reverberant or complex environments, **without the need for large spaces or bulky loudspeakers**.

ULTRA-COMPACT FORMAT AND IP54 RATING FOR DISCREET INDOOR/OUTDOOR INSTALLATIONS

Just 60 mm wide, with dust and splash protection—perfect for elegant applications in both public and private venues.

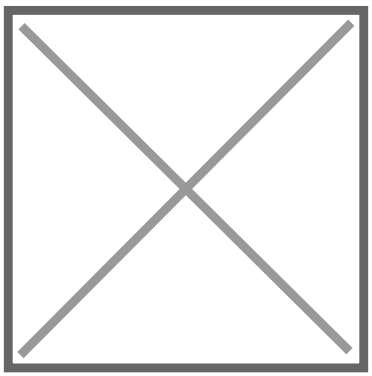

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GF82W I

ULTRA-COMPACT 8X2’ PASSIVE COLUMN LOUDSPEAKER WITH K-ARRAY™ PAT® TECHNOLOGY, 200 W, 16 ? (WHITE)

PRODUCT DETAILS

KEY FEATURES

- Elegant and Compact Design
- Line array Tecnology by K-array™ PAT® (Pure Array Technology)
- Wide and deep sound coverage
- Seamless integration with installation ambience

SPECIFICATIONS

Type	Passive Loundspeaker
Transducers	8x 2" Woofer in ferrite
Risposta in frenquenza	150 Hz - 20 kHz (-6dB)
Max.SPL?119dB	
Power Handling	200 W
Nominal Impedance	16? - 64? selectable
Coverage	V. 15° | H. 90°
Dimensions (WxHxD)	60x600x65 mm
Weight	1,6 kg (3,53 lb)
Material	ABS
IP rating	IP54
Color	White
Connectors	1x Phoenix connector (4-pin euroblock)

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it