

GP12

PASSIVE SYSTEM 12" SUBWOOFER + 16X2" MODULAR ARRAY COLUMN

GP12 is a passive system composed of a 12" subwoofer and a modular column with 16 neodymium 2" drivers, designed to deliver powerful and controlled sound in a compact format. Its column configuration, featuring drivers mounted at alternating angles, ensures a 140° horizontal coverage, ideal for environments that require wide and even sound dispersion.

Designed for professional settings where fast setup, audio quality, and portability are essential, GP12 is well-suited for temporary events, corporate installations, trade shows, small stages, and broadcast environments.

It can be powered by an active GP12A unit or by amplifiers such as the GA43, making it a flexible and scalable solution. The subwoofer, built from birch plywood, and the ABS column modules provide a solid yet lightweight structure, with IP43/IP54 protection ratings, suitable for less controlled environments.


With a maximum SPL of 123 dB and a frequency response from 45 Hz to 20 kHz, GP12 combines high performance and ease of use in an elegant, professional design.



GP12

PASSIVE SYSTEM 12" SUBWOOFER + 16X2" MODULAR ARRAY COLUMN

HIGHLIGHTS

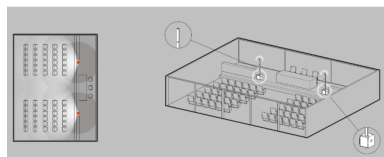


COLUMN WITH 140° HORIZONTAL DISPERSION THANKS TO THE ANGLED DRIVERS

This configuration creates a **very wide and immersive sound field**, while maintaining a narrow vertical projection to avoid unwanted reflections.

QUALITY, SPEED AND COMPACTNESS

Designed for professional contexts where speed of assembly, audio quality and portability are essential, the GP12 boasts lightness of materials and compactness in construction.



GP12

PASSIVE SYSTEM 12" SUBWOOFER + 16X2" MODULAR ARRAY COLUMN

PRODUCT DETAILS

KEY FEATURES

High performance in a portable format: up to 123 dB SPL and frequency response from 45 Hz to 20 kHz, with a clear, dynamic and coherent sound reproduction.

Piloting versatility: It can be powered by an active unit (GP12A) or an external amplifier (e.g. GA43), making it flexible in stereo or dual mono systems.

Robust and lightweight construction: subwoofer in birch plywood and ABS columns, with IP43/IP54 protection for applications even in partially exposed environments.

Easy transport and quick assembly: ideal for temporary events, corporate events, fairs, broadcasts or small stages, thanks to the compact structure and plug-and-play assembly.

SPECIFICATIONS

Type	12" Subwoofer + 16x2" Modular Column System
Transducers	SUB
Frequency Response	45 Hz - 20 kHz (-6dB)
Max SPL	123 dB
Rated Power	SUB
Coverage	V. 25° H. 140°
Connectors	2x Speakon NL4
Nominal Impedance	SUB
Dimensions (W x H x D)	405x2080x430 mm (15.94x81.89x16.93 in)
Weight	19kg (41.88lbs)
Material	SUB

GP12

PASSIVE SYSTEM 12" SUBWOOFER + 16X2" MODULAR ARRAY COLUMN

Colors

Black

IP Rating

SUB