

VM-50

5" ACTIVE MONITOR SPEAKER

The active VM-50 produces clear audio with fast-attacking, punchy bass. The speaker can be tuned to suit the characteristics of any room, making it perfect for recreating a club sound when you're DJing or providing a flat frequency response when you're producing music in a home or professional studio setting.

VM-50

6d482dff-383c-45d6-940f-279745a5f73c.png


683f1cfa-7a66-45d9-8b70-91b65c9cd0f5.jpg

e11c6841-f62b-47dc-b72c-6507e5fe

VM-50

5" ACTIVE MONITOR SPEAKER

HIGHLIGHTS

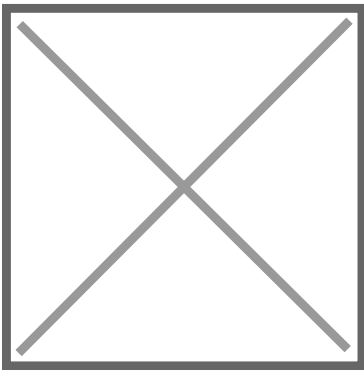

**ARAMID FIBER WOOFER CONES AND
VORTEX BASS ACCELERATOR**

VM-50

5" ACTIVE MONITOR SPEAKER

PRODUCT DETAILS

KEY FEATURES

- Clear, low-distortion audio with fast-attacking bass: Recreate club-style sound
- High-quality components
- Class D amplifier with 96 kHz sampling DSP to enable wide-bandwidth audio reproduction.
- Aramid fiber woofer cones and Vortex Bass Accelerator
- Constant directivity horn
- DSP control. All VM series speakers are voiced flat to ensure you hear the natural sound of the music.
- Fresh, professional design
- Color: Black

SPECIFICATIONS

Type	Bi-amp 2-way active speaker
Tweeter	1-inch (25 mm) SILK soft dome
Woofer	5.25-inch (133 mm) ARAMID cone
Auto Standby	
Maximum Sound Pressure	107 dB
Amplifier Output	Class D with 96kHz DSP; LF
Frequency Range	40 Hz - 36 kHz Hz
Impedance	10 k?
High EQ	4 selective EQs
Low EQ	4 selective EQs
Cross Over Frequency	3 kHz

VM-50

5" ACTIVE MONITOR SPEAKER

Power Supply	AC 100-240 V, 50 Hz / 60Hz
Enclosure	Bass reflex
Enclosure material	MDF vinyl laminate
Baffle material	HIPS with 4mm Aluminum Plate
Inputs	XLR/TRS combo x 1 (balanced input); RCA x 1 (unbalanced input)
Dimensions (LxHxD)	198x300x265 mm
Weight	5.5 kg
What's in the Box	VM-50 x 1 (not sold as a pair); Power cable x 1; Cushioned feet pads x 1 (4pcs/1 sheet); Precautions for Use; Instruction Manual; Warranty (for some regions)