

HOOK NDL-3

DRUM & LOOP

The HOOK Drum & Loop (NDL-3) is a mini looper pedal with **auto tempo detection**, intelligent and simple to operate. Just record a phrase loop, then add a synchronized drum beat. Or you can use the included **Smart Tap Tempo** and play the drum beat, then start to record the phrase loop.

When recording your phrase loop, you can choose **Normal Recording** or **Auto Recording**. This is convenient while you put the HOOK on the desk.

HOOK NDL-3

2a24e8d3-feec-436e-aad2-417e3e199d2d.jpg

29bf82f1-17cf-4333-9983-2ae95eb02eb6.jpg

9f15aa4f-60a0-4d45-8880-f94720f6

HOOK NDL-3

DRUM & LOOP

HIGHLIGHTS




INTELLIGENT AND SIMPLE

There is nothing to tweak: simply record a phrase loop, then add a synchronized drum beat. Or you can use the included **Smart Tap Tempo** and play the drum beat, then start to record the phrase loop.

NORMAL AND AUTO MODES


Normal Recording (NR) is like regular looper pedal: press the footswitch and Hook starts to record right away. In **Auto**

Recording (AR) mode HOOK starts recording once it detects your guitar signal. This is convenient while you put the HOOK on the desk.

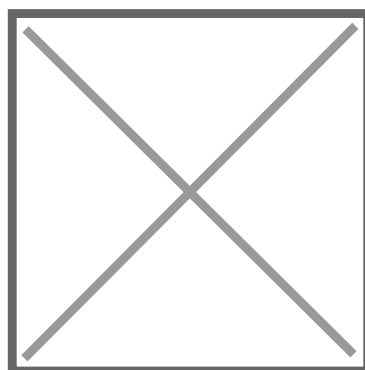

HOOK NDL-3

DRUM & LOOP

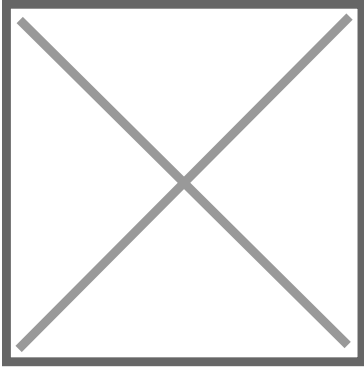

HI QUALITY RESOLUTION AND INDEPENDENT BEATS/LOOPS

The HOOK features **24-bit/44.1kHz recording resolution** and **6 minutes recording time** with unlimited overdubs. It is true-bypass and analog dry-through. The drum beats and loop playback are independent, which means that you can stop the loop and keep the drum beat playing.

HOOK NDL-3

DRUM & LOOP

PRODUCT DETAILS

KEY FEATURES

24-bit phrase loop with auto tempo detection rhythm in a mini enclosure

11 rhythm styles with Smart Tap Tempo

Up to 6 minutes recording, unlimited overdubs

Drum and Loop volumes can be adjusted separately

2 modes: Normal/Auto

True-bypass and analog dry-through

1/8" phones out for silent practice

Low power consumption (less than 100mA)

USB-C port for firmware update, file import/export

SPECIFICATIONS

Input Impedance?1M?

Output Impedance?10k?

Phones Output Impedance	10?
-------------------------	-----

Dynamic Range	103 dB
---------------	--------

DSP Processing	44.1KHz / 32-bit
----------------	------------------

A/D D/A Sampling Rate	48KHz / 24-bit
-----------------------	----------------

Power?9V DC(Negative tip, Optional ACD-006 adapter)

Current Draw	less than 100mA
--------------	-----------------

Dimensions?94(L)X51(W)X53(H)mm

Weight?175g