

GC6-RNW

6.5" PASSIVE CEILING/WALL-MOUNTED SPEAKER (ROUND GRILLE, WHITE)


GC6-RNW

The GC6 is a 2-way passive speaker with a 6.5" coaxial woofer and 0.75" titanium dome tweeter, designed for residential and commercial applications. It delivers a frequency response from 60 Hz to 20 kHz, 130° coverage, and SPL up to 110 dB.

It features a paintable frameless magnetic grille, available in round (GC6-RN, with rotatable tweeter) or square (GC6-SQ) versions, allowing seamless integration in domestic and commercial spaces like hotels, restaurants, meeting rooms, or retail stores.

The GC6 is designed for infinite baffle operation, requiring no back box, and is optimized for drywall, wood, or tile installations. With a depth of 87 mm and a weight of 1.52 kg, it combines compactness and ease of installation with high-end acoustic performance.

Its 8-ohm nominal impedance ensures easy integration into distributed systems. The GC6 is compatible with KGEAR amplifiers (GA201, GA41/41L, GA43/43L, GA46/46L) and subwoofers like GC8S or GS6, providing a complete and scalable audio solution.




Coaxial Speaker Frameless Low Impedance 2-Way Speaker

GC6-RNW

6.5" PASSIVE CEILING/WALL-MOUNTED SPEAKER (ROUND GRILLE, WHITE)

HIGHLIGHTS

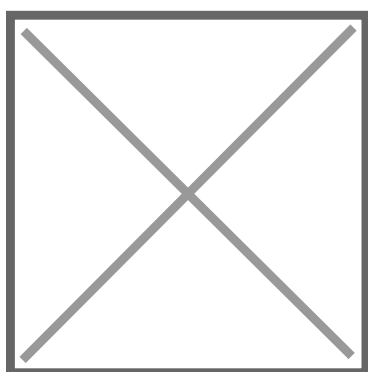


ADJUSTABLE TWEETER FOR CUSTOMIZED LISTENING

The RN (round) version of the GC6 integrates an adjustable tweeter, which allows you **to precisely direct the high frequencies towards the listening area**, for a sound that is always clear and detailed, even in irregular environments or with unconventional configurations. A rare feature in in-wall speakers, which transforms architectural integration into a tailor-made audio experience.

FRAMELESS DESIGN FOR SEAMLESS ARCHITECTURAL INTEGRATION

The grille with no visible frame allows the GC6 to virtually disappear after installation, delivering a clean, minimalist aesthetic—ideal for refined interiors or design-sensitive environments.

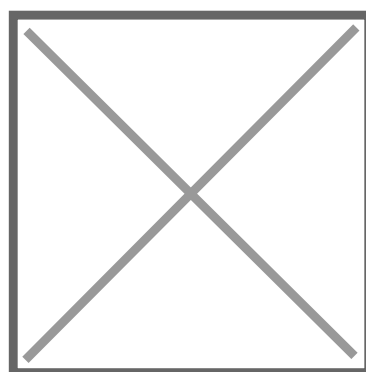

GC6-RNW

6.5" PASSIVE CEILING/WALL-MOUNTED SPEAKER (ROUND GRILLE, WHITE)

PRODUCT DETAILS

KEY FEATURES

High-performance coaxial system: 6.5" woofer with ferrite magnet and 0.75" titanium dome tweeter for detailed, natural and balanced audio reproduction over the entire frequency range.

Wide sound coverage (130°): ensures uniform sound dispersion, ideal for medium to large sized residential or commercial environments.

High sound pressure (SPL max 110 dB): offers power and clarity even in installations where a large listening area is required.

Infinite Baffle Design: Optimized for installation in drywall, wood or other building materials without the need for a back box, for maximum simplicity and acoustic consistency.

SPECIFICATIONS

Type	Passive loudspeaker
Transducers	6,5" coax ferrite magnet woofer 0,75" titanium dome tweeter
Frequency Response	60 Hz - 20 kHz (-10dB)
Maximum SPL (1kHz, 10%THD)	110 dB (Peak)
Rated Power	60 W 120 W Peak
Coverage	130°
Connectors	Spring terminals
Nominal Impedance	8 ?
Dimensions (W x H x D)	227x210x87 mm (8.9x8.3x3.4 in)
Weight	1.52 kg (3,3 lb)
Material	ABS

GC6-RNW

6.5" PASSIVE CEILING/WALL-MOUNTED SPEAKER (ROUND GRILLE, WHITE)

Colors

White