


2313000000

FENDER® LINK I/O™, US, CA, EU, AU, JP

The perfect tool to capture your next riff, the Fender Link I/O™ is a studio-grade audio interface that can fit in your pocket. The Fender Link I/O provides pristine, bi-directional audio over USB connection, making it a one stop shop for connecting your instrument and headphones to your phone, tablet, Mac, or PC.




Featuring an input stage designed to replicate the dynamic response of Fender's world-famous amplifiers and uncompromising 24-bit / 96kHz audio, the Fender Link I/O delivers high fidelity tone from any passive or active instrument straight into your device. The integrated input meter and mix control provide the ultimate latency-free monitoring experience, while the weighted body ensures a stable workflow in any environment.

Whether you're tracking your next big song or practicing through your favorite amp simulator app, take Fender® quality recording on the go with the Fender Link I/O.

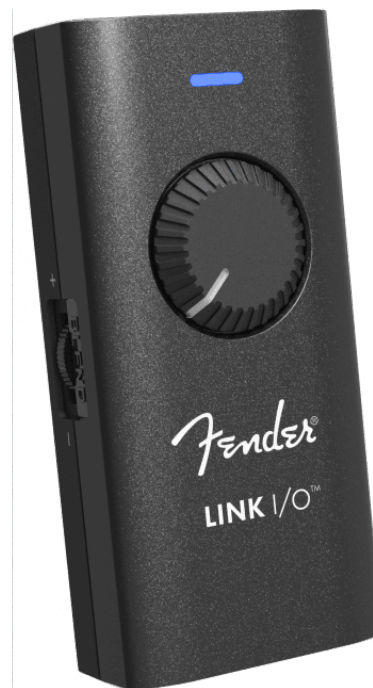

2313000000

FENDER® LINK I/O™, US, CA, EU, AU, JP



2313000000

FENDER® LINK I/O™, US, CA, EU, AU, JP

PRODUCT DETAILS

KEY FEATURES

Studio quality 24-bit / 96kHz analog to digital conversion for high fidelity tone

High impedance input stage reacts just like an amplifier input jack

Side mounted mix control for monitoring with lowest possible latency

Side mounted pad switch accommodates high output and active instruments

Monitor your recording level in real time with the reactive LED signal meter

Weighted body with anti-skid silicone feet for stable recording on any surface

Powered by the USB-C® connection, no power adapter needed

Wide compatability across iOS, Andriod, Mac, and PC devices

SPECIFICATIONS

Inputs	One - 1/4"
Headphone	Jack1/8" Stereo
Voltage	USB Bus Powered
Digital Audio Bit Depth	24-bit
Instrument Input Connection Type	1/4"
Headphone Outputs Connection Type	
Audio Controls	
Supported Sample Rates	44.1k, 48k, 88.2k, 96kHz
Included Accessories	USB-C to USB-C Cable
Dimensions	2.20x6.30x7.00 IN / 38.1x25x8 mm