





B-3RC

# 2.4GHZ WIRELESS MICROPHONE SYSTEM

The **NUX B-3RC**, 2.4GHz microphone system, frees you from the annoying cables, and enjoy the wireless world with **non-complicated functions and setups**. The more compact size brings better using experience. An extra **dynamic microphone** and **charging storage box** are packed into the bundle set.



**B-3RC**

# 2.4GHZ WIRELESS MICROPHONE SYSTEM

## HIGHLIGHTS




### INSTANT SETUP, EASY OPERATION

B-3RC has auto pairing and channel group selection. Plug the Transmitter (TX) to your mic, Receiver (RX) to PA system, and you are good to go. The units will automatically detect each other and choose the best channel from all 6 channels.

Delivering detailed consideration for performers' control need, B-3RC allows to swiftly mute from Transmitter (TX)'s power switch button.

### CUTTING-EDGE WIRELESS TECHNOLOGY

With advanced 2.4GHz wireless technology, enjoy your high-resolution audio quality of 24-bit/44.1kHz with B-3RC. The interference-free signal transmission up to 100 feet (30 meters), ensuring uninterrupted control and excellent performance.

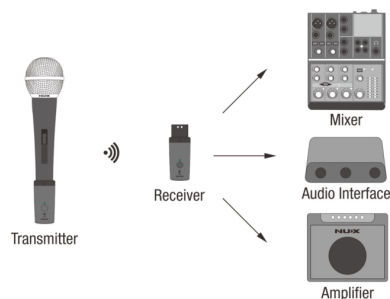

**B-3RC**

# 2.4GHZ WIRELESS MICROPHONE SYSTEM

## COMPACT FOR ENHANCED PORTABILITY

The Transmitter (TX) and Receiver (RX) measure just 80mm in length and weigh only 36g each.



## LONG LASTING BATTERY AND POWER CASE

Long-lasting lithium battery brings up to 3.5 hours of using time on one charge. With the charging case, charging could never be easier. And you can charge the case through the USB-C port.



## B-3RC

# 2.4GHZ WIRELESS MICROPHONE SYSTEM

## PRODUCT DETAILS

### KEY FEATURES

Easy to use 2.4GHz wireless microphone system with auto pairing and auto channel selection

A complete bundle including dynamic microphone and charging case

24bit Hi-Resolution audio quality

Ultra-low latency<4.8ms

Long-lasting built-in lithium battery (3.5 hours working time)

### SPECIFICATIONS

2.4GHz operating frequency

24 bit sampling accuracy

<b>Latency</b>	<4.8ms
----------------	--------

<b>Transmission Range</b>	Up to 30 meters line-of- sight
---------------------------	--------------------------------

THD + Noise <0.1% @ 1kHz

<b>Built-in Battery Capacity (TX&amp; RX)</b>	330mAh/3.7V
---	-------------

<b>TX/RX Battery Running Time</b>	3.5 hours
-----------------------------------	-----------

<b>TX/RX Battery Charging Time</b>	around 2.5 hours
------------------------------------	------------------

<b>Storage Box Battery Capacity</b>	3000mAh/3.7V
-------------------------------------	--------------

<b>Storage Box Battery Charging Time</b>	around 4 hours
--	----------------

<b>Transmitter</b>	80mm(L) x 24mm(W) x 24mm(H) / 36 g
--------------------	------------------------------------

<b>Receiver</b>	80mm(L) x 24mm(W) x 24mm(H) / 36 g
-----------------	------------------------------------

<b>Mic Type</b>	dynamic uni-directional (Cardioid) polar pattern
-----------------	--

<b>Mic frequency response</b>	50Hz - 15kHz
-------------------------------	--------------

B-3RC

## 2.4GHZ WIRELESS MICROPHONE SYSTEM

Mic impedance	600? +15%(AT 1kHz)
Mic dimensions	164 mm (L) x 50 mm (L) x 50 mm (H)
Mic weight	213 g