B-3RC

2.4GHZ WIRELESS MICROPHONE SYSTEM

The **NUX B-3RC**, 2.4GHz microphone system, frees you from the annoying cables, and enjoy the wireless world with **non-complicated functions and setups**. The more compact size brings better using experience. An extra **dynamic microphone** and **charging storage box** are packed into the bundle set.

B-3RC

fb4e7387-4b66-4fd2-bf27-9358f2ba903c.jpg

d7e32cd5-05a2-4192-89c1-2a0d71ee8900.jpg

84f81679-1809-4ea9-b573-763ae42

955e53ad-3447-469a-aa64-32e3d2a04d27.jpg

a7016d8e-d484-4834-add1-3b0dcc7d8e0f.jpg


bc2397fe-8257-4c4b-9955-cb411

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

B-3RC

2.4GHZ WIRELESS MICROPHONE SYSTEM

HIGHLIGHTS

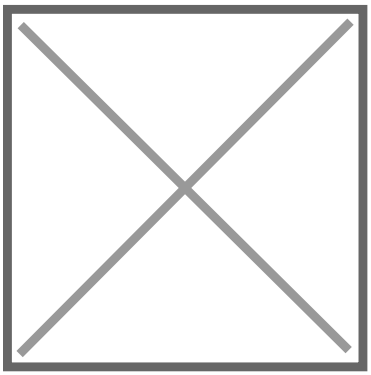


INSTANT SETUP, EASY OPERATION

B-3RC has auto pairing and channel group selection. Plug the Transmitter (TX) to your mic, Receiver (RX) to PA system, and you are good to go. The units will automatically detect each other and choose the best channel from all 6 channels. Delivering detailed consideration for performers' control need, B-3RC allows to swiftly mute from Transmitter (TX)'s power switch button.

CUTTING-EDGE WIRELESS TECHNOLOGY


With advanced 2.4GHz wireless technology, enjoy your high-resolution audio quality of 24-bit/44.1kHz with B-3RC. The interference-free signal transmission up to 100 feet (30 meters), ensuring uninterrupted control and excellent performance.

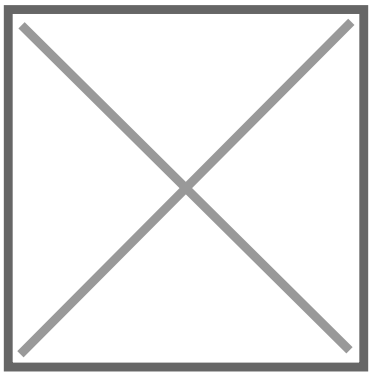

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

B-3RC

2.4GHZ WIRELESS MICROPHONE SYSTEM

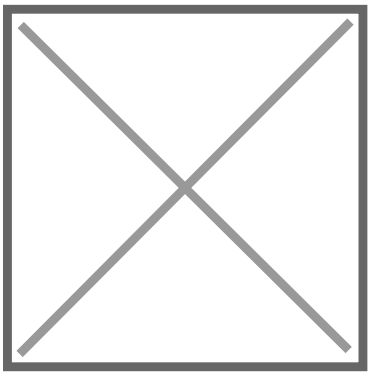


COMPACT FOR ENHANCED PORTABILITY

The Transmitter (TX) and Receiver (RX) measure just 80mm in length and weigh only 36g each.

LONG LASTING BATTERY AND POWER CASE

Long-lasting lithium battery brings up to 3.5 hours of using time on one charge. With the charging case, charging could never be easier. And you can charge the case through the USB-C port.

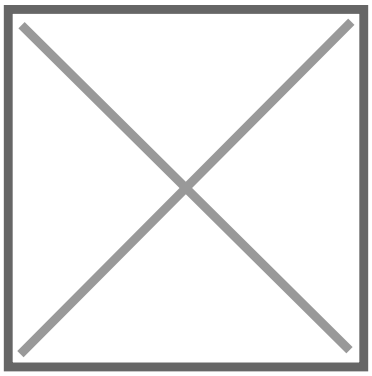

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

B-3RC

2.4GHZ WIRELESS MICROPHONE SYSTEM

PRODUCT DETAILS

KEY FEATURES

- Easy to use 2.4GHz wireless microphone system with auto pairing and auto channel selection
- A complete bundle including dynamic microphone and charging case
- 24bit Hi-Resolution audio quality
- Ultra-low latency<4.8ms
- Long-lasting built-in lithium battery (3.5 hours working time)

SPECIFICATIONS

2.4GHz operating frequency	
24 bit sampling accuracy	
Latency	<4.8ms
Transmission Range	Up to 30 meters line-of- sight
THD + Noise <0.1% @ 1kHz	
Built-in Battery Capacity (TX& RX)	330mAh/3.7V
TX/RX Battery Running Time	3.5 hours
TX/RX Battery Charging Time	around 2.5 hours
Storage Box Battery Capacity	3000mAh/3.7V
Storage Box Battery Charging Time	around 4 hours
Transmitter	80mm(L) x 24mm(W) x 24mm(H) / 36 g
Receiver	80mm(L) x 24mm(W) x 24mm(H) / 36 g
Mic Type	dynamic uni-directional (Cardioid) polar pattern
Mic frequency response	50Hz - 15kHz

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

B-3RC

2.4GHZ WIRELESS MICROPHONE SYSTEM

Mic impedence	600? +15%(AT 1kHz)
Mic dimensions	164 mm (L) x 50 mm (L) x 50 mm (H)
Mic weight	213 g

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it