

MINI SCF NCH-5

MINI SUPER CHORUS STOMPBOX (CHORUS, FLANGER, PITCH MODULATION)

The mini SCF (Super Chorus, Flanger & Pitch Modulation) tributes to TC Electronic's **Stereo Chorus Flanger**, one of the best modulation pedals ever made since 1976.

NUX's modern-tech DSP yields a perfect combination of both worlds: analog and digital. To achieve all of the objectives, our engineers had to develop an algorithm that mimics the principles of BBD chips - the key component of Analog Chorus effects.

MINI SCF NCH-5

[d5eefcc5-4f02-4a17-8c0d-33996691fce7.jpg](#)

[18ef090f-cb35-4d13-9048-ca918c9720cf.jpg](#)

[346b8c52-4646-451e-883b-01269421](#)

[7fb27366-4c87-4e8f-9698-c1332006da28.jpg](#)


[8c96360a-e995-4103-a156-9fae5529169f.jpg](#)

[5fe84a41-b066-4f6b-8c44-f8e7a241](#)

MINI SCF NCH-5

MINI SUPER CHORUS STOMPBOX (CHORUS, FLANGER, PITCH MODULATION)

HIGHLIGHTS

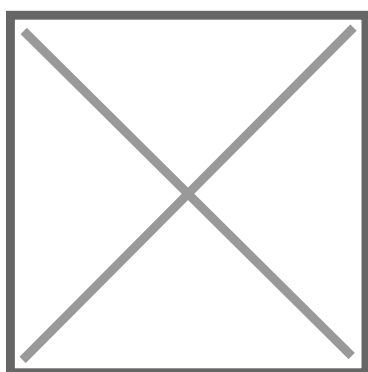


A COMPACT AND SMART PEDAL INSPIRED BY A SUPER CLASSIC

Inspired by TC Electronic's Super Chorus, MINI SCF gathers Chorus, Flanger and Pitch Modulation in a super compact, intuitive and flexible unit, where the best of analog and digital worlds join together to improve tones that have made history.

THE POWER OF NUX DSP

Using DSP technology, NUX is able to offer a mini-pedal with 3 FXs, wider dynamic range, 9V DC power, smart tap tempo that innovates the origin and gives you more good vibes.

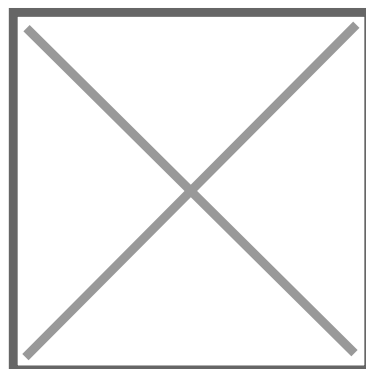

MINI SCF NCH-5

MINI SUPER CHORUS STOMPBOX (CHORUS, FLANGER, PITCH MODULATION)

PRODUCT DETAILS

KEY FEATURES

Tribute to a legendary modulation pedal

Chorus, Flanger, Pitch modulation in a single mini stompbox

Smart Tap Tempo

True-bypass or Buffer-bypass

Supports Stereo I/O with TRS Cable

Low power consumption (Less than 100mA)

USB-C port for firmware updates

SPECIFICATIONS

Input Impedance	1M Ω
-----------------	-------------

Output Impedance	10k Ω
------------------	--------------

Dynamic Range	103 dB
---------------	--------

DSP Processing	48KHz / 32-bit A/D D/A
----------------	------------------------

Sampling Rate	48KHz / 24-bit
---------------	----------------

Power	9V DC (Negative tip, Optional ACD-006A adapter)
-------	---

Current Draw	less than 100mA
--------------	-----------------

Dimensions	94(L)X51(W)X53(H)mm
------------	---------------------

Weight	175g
--------	------