

PS22

PROSTUDIO 2X2 USB AUDIO INTERFACE

Maono ProStudio PS22 streaming audio interface is the ultimate solution for recording high-quality audio and connecting to a wide range of equipment.

Featuring premium preamps with up to 60dB of gain range, 24bit/192KHz sampling rate, and 2-in/2-out configuration, the PS22 delivers studio-level sound for your audio and music production.

Unlike the traditional audio interface, PS22 supports smartphone connectivity via either USB-C or TRRS connection.

Whether you're a musician, podcaster, streamer or contents creator, the PS22 is perfect tool to take your audio production to the next level.

PS22

fbc0ecae-9058-4432-bbbb-1c6a92ef60d5.jpg


314bad7d-5305-4539-931b-77573eb7c513.jpg

c5ba2a6a-8640-4086-ac4a-856a1

PS22

PROSTUDIO 2X2 USB AUDIO INTERFACE

HIGHLIGHTS

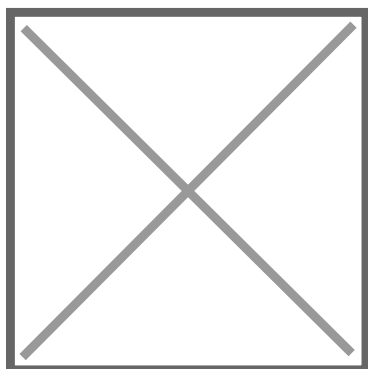


EXCEPTIONAL SOUND PERFORMANCE

With a high sampling rate of 24 bit/192 kHz, the PS22 audio interface ensures precise sound reproduction, low distortion and minimal latency enhancing your recording experiences with high-quality studio sound.


HIGH-QUALITY MICROPHONE PREAMPS

The PS22 Audio Interface offers up to 60 dB of gain range. Capture audio details and every musical nuance precisely using the high-end built-in preamp whether you're using a highly sensitive condenser microphone or a dynamic microphone known for its low sensitivity.

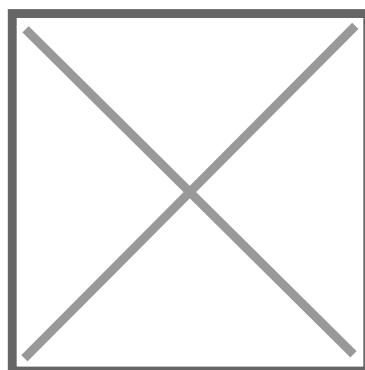

PS22

PROSTUDIO 2X2 USB AUDIO INTERFACE

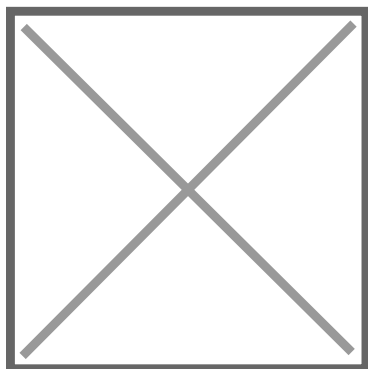


MULTI-CHANNEL INPUT/OUTPUT

The PS22 audio interface features 2 input and 2 output ports, with the ability to expand to an additional 6 virtual channels via MAONO ProStudio routing software. This innovative design sets a new standard in the XLR audio interface market, offering unmatched convenience for multi-channel mixing and live streaming needs.

WIDE CONNECTIVITY

Designed for ease of use, the PS22 XLR interface features dual USB-C ports, ensuring compatibility with various devices including smartphones, computers and tablets so you can connect and record effortlessly wherever you go.

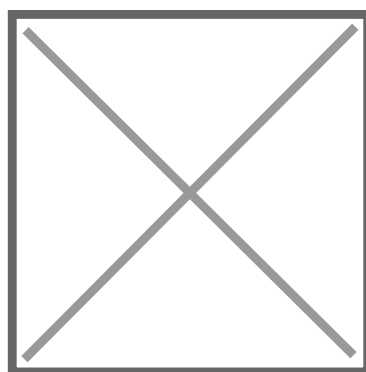

PS22

PROSTUDIO 2X2 USB AUDIO INTERFACE

PRODUCT DETAILS

KEY FEATURES

Premium Mic Preamps with up 60dB of gain range

24bit/192Khz sampling rate

2-In/2-Out with two combo XLR/TS-TRSt/Line-In Inputs

Dual USB-C Connectivity

"Pass-Thru" charging for select mobile devices

Two virtual In and Two virtual out channels

Phantom Power Switch and LED indicator for Combo XLR Input 1 & 2

Advanced Routing software

Monitor Mix with Mono/Stereo Switch

All Metal Chassis

SPECIFICATIONS

Main USB-C Sampling Rate	44,1KHz, 48KHz, 88KHz, 96KHz, 176,4KHz, 192KHz
--------------------------	--

Secondary USB-C Sampling Rate	48KHz
-------------------------------	-------

Microphone Inputs - Frequency response	20Hz ~ 20KHz, $\pm 0,25$ dB
--	-----------------------------

Microphone Inputs - Dynamic Range	105dB (A-Weighted)
-----------------------------------	--------------------

Microphone Inputs - THD+N Ratio	0,00%
---------------------------------	-------

Microphone Inputs - Noise Ein -127dB (A-Weighted)

Microphone Inputs - Max Input Level	-5dBu
-------------------------------------	-------

Microphone Inputs - Gain Range	6 ~ +60dB
--------------------------------	-----------

Microphone Inputs - Impedance	3,3 K Ω
-------------------------------	----------------

PS22

PROSTUDIO 2X2 USB AUDIO INTERFACE

Line Inputs - Frequency response	20Hz ~ 20KHz, ± 1 dB
Line Inputs - Dynamic Range	104dB (A-Weighted)
Line Inputs - THD+N Ratio	0,00%
Line Inputs - Max Input Level	8dBu
Line Inputs - Gain Range	-6 ~ +48dB
Line Inputs - Impedance	13,5 K Ω
TS/TRS Inputs - Frequency response	20Hz ~ 20KHz, ± 2 dB
TS/TRS Inputs - Dynamic Range	102dB (A-Weighted)
TS/TRS Inputs - THD+N Ratio	0,01%
TS/TRS Inputs - Max Input Level	0dBu
TS/TRS Inputs - Gain Range	3 ~ +57dB
TS/TRS Inputs - Impedance	100 K Ω
Main Outputs - Frequency response	20Hz ~ 20KHz, $\pm 0,1$ dB
Main Outputs - Dynamic Range	103dB (A-Weighted)
Main Outputs - THD+N Ratio	0,00%
Main Outputs - Max Output Level	8dBu
Main Outputs - Impedance	600 K Ω
Headphone Output - Frequency response	20Hz ~ 20KHz, $\pm 0,5$ dB
Headphone Output - Dynamic Range	102dB (A-Weighted)
Headphone Output - THD+N Ratio	0,01%
Headphone Output - Max Output Power	100mW
Headphone Output - Impedance	18 Ω
USB	2 x USB 2.0 Type-C Connector
Phantom Power	48V, 6mA
USB-C Input Power Supply	5V
Max Current	1 A