

CYC208-RED

PASSIVE REFLEX SUBWOOFER WITH DUAL 8" WOOFERS, 300 W AES, 8 ?, IP-RATED, FIBREGLASS CABINET (RED)

The Cyclone 208 is a high-performance compact subwoofer, designed to complement Cyclone 4 and Cyclone 55 in discreet yet powerful audio setups. Despite its small footprint, the dual 8" low-frequency drivers and low-resonance fibreglass cabinet deliver extended low-end response and exceptional output.

Its compact form factor makes it ideal for applications where floor space is at a premium, while the UV-resistant finish, marine-grade fittings, and included polished stainless-steel bracket ensure long-lasting performance in premium indoor or outdoor installations—such as bars, restaurants, beach clubs, theme parks, and retail environments.

CYC208-RED

[205a7518-2d5b-495a-924a-b1e06b8daf88.jpg](#)

[2b6585e5-64bc-414e-9953-5bcfaab5834c.jpg](#)

CYC208-RED

PASSIVE REFLEX SUBWOOFER WITH DUAL 8" WOOFERS, 300 W AES, 8 Ω, IP-RATED, FIBREGLASS CABINET (RED)

HIGHLIGHTS



MAXIMUM PERFORMANCE IN MINIMAL SPACE

With its dual 8" reflex-loaded configuration, Cyclone 208 delivers deep, accurate low-end in a compact footprint, perfect for space-conscious installations.


ELEGANT DESIGN MEETS FULL DURABILITY

Its fibreglass enclosure and stainless-steel fittings provide both longevity and style, with the polished mounting bracket included for secure installation—even outdoors.



CYC208-RED

PASSIVE REFLEX SUBWOOFER WITH DUAL 8” WOOFERS, 300 W AES, 8 ?, IP-RATED, FIBREGLASS CABINET (RED)

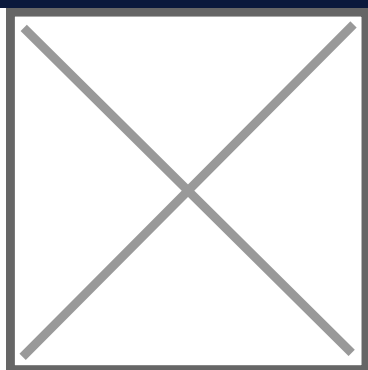

CUSTOM COLORS AVAILABLE UPON REQUEST

In addition to the 3 iconic Void brand colors -red, white and black- Cyclone 208 can be produced in several other custom colors (the colors visible in the image are examples for illustrative purposes)

CYC208-RED

PASSIVE REFLEX SUBWOOFER WITH DUAL 8” WOOFERS, 300 W AES, 8 Ω, IP-RATED, FIBREGLASS CABINET (RED)

PRODUCT DETAILS

KEY FEATURES

- Delivers up to 125 dB peak SPL
- Polished stainless steel bracket included
- Perfect for premium indoor/outdoor installations

SPECIFICATIONS

Frequency Response	42 Hz - 120 Hz ±3 dB
Efficiency	95 dB 1 W / 1 m
Nominal impedance	8 Ω
Power handling	300 W AES
Maximum output	119 dB Cont, 125 dB Peak
Driver configuration	2x 18" LF
Connectors	Phoenix connector with link out
Weight	22 kg (48.5 lbs)
Enclosure	Fibreglass composite
Mounting	Ground stack bracket
Dimensions (W x H x D)	296.1m x 513.1mm x 322.6mm
Colors	Red
Finish	Smooth cellulose