VENU 118v2

REFLEX SUBWOOFER WITH 18” TRANSDUCER, 8 ?, 1200 W (BLACK)

The Venu 118 V2 is a 18" subwoofer designed to deliver tight and powerful bass in a discreet, easy-to-integrate format. Its high-excursion transducer with a 4” voice coil ensures precise and deep low-frequency reproduction, reaching down to 37 Hz and delivering a maximum peak SPL of 132 dB. The recessed rear connector panel allows for flush wall placement, while the speakON™ and Phoenix connectors ensure fast and reliable setup. The enclosure, built from 18 mm multi-laminate birch plywood, features mounting points and an optional M20 top hat, making the Venu 118 V2 suitable for both fixed installations and touring use.

b07b2204-38e1-406c-b6be-cee750359005.jpg


VENU 118v2

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

VENU 118v2

REFLEX SUBWOOFER WITH 18” TRANSDUCER, 8 ?, 1200 W (BLACK)

HIGHLIGHTS

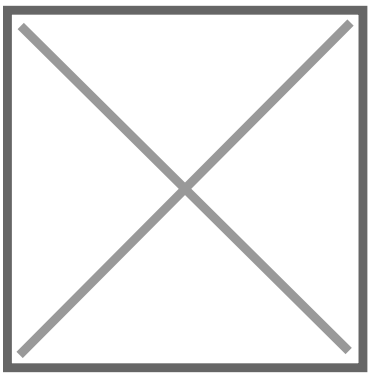


COMPACT POWER WITH PRECISION

The **18” high-excursion driver** with **4” copper voice coil** delivers tight response and excellent thermal durability, ensuring **defined low-end even at high SPL levels**.

REFLEX SYSTEM DESIGN FOR DEEPER BASS


The **compact reflex design** provides **extended reproduction down to 37 Hz**, making the Venu 118 V2 ideal for **spaces needing powerful bass without bulky enclosures**.

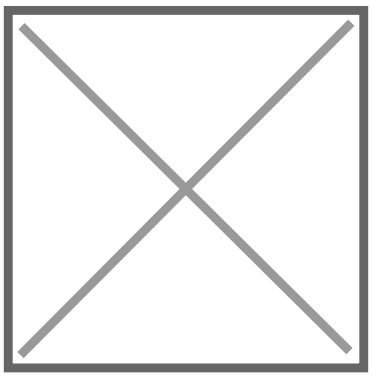

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

VENU 118v2

REFLEX SUBWOOFER WITH 18” TRANSDUCER, 8 ?, 1200 W (BLACK)

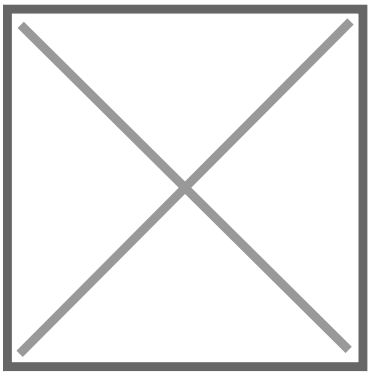

CUSTOM COLORS AVAILABLE UPON REQUEST

The Venu 118 V2 is ingeniously enhanced in aesthetics as well as functionality thanks to its colour customisation providing the chance to own a bespoke product that will compliment any location (the colors visible in the image are examples for illustrative purposes)

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

VENU 118v2

REFLEX SUBWOOFER WITH 18” TRANSDUCER, 8 ?, 1200 W (BLACK)

PRODUCT DETAILS

KEY FEATURES

- Recessed connector panel allows flush wall placement while maintaining full accessibility and durability
- Fast and secure connectivity with speakON™ and Phoenix connectors featuring link outs
- Durable 18 mm birch plywood construction, engineered to be resonance-free and long-lasting for permanent installs
- Fine-textured polyurethane coating, highly resistant to scratches and impact, ideal for public or commercial spaces
- Integrated fixing points for wall or ceiling mounts (optional M20 mount for mobile or pole applications)

SPECIFICATIONS

Frequency Response	37 Hz - 180 Hz ±3 dB
Efficiency	97 dB 1W/1m
Crossover points	80 Hz - 160 Hz active
Nominal impedance	8 ?
Power Handling	1200 W AES
Maximum output	126 dB cont, 132 dB peak
Driver configuration	1x 18” LF
Connectors	1x Phoenix with link out and 1x speakON™ with link out
Weight	42.48kg (93.65 lbs)
Dimensions (W x H x D)	548mm x 557mm x 636mm
Enclosure	18 mm birch plywood
Mounting	Optional M20 top hat for pole mount, Yoke bracket positions Type 75 plate

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

VENU 118v2

REFLEX SUBWOOFER WITH 18” TRANSDUCER, 8 ?, 1200 W (BLACK)

Finish	Textured polyurethane
Grille	Perforated steel with foam filter
Colors	Black

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it