VENU 112v2WH

12" COMPACT REFLEX SUBWOOFER, 8 ?, 600 W (WHITE)

The Venu 112 V2 is a compact 12" subwoofer designed to deliver tight and powerful bass in a discreet, easy-to-integrate format. Its high-excursion transducer with a 4” voice coil ensures precise and deep low-frequency reproduction, reaching down to 40 Hz and delivering a maximum peak SPL of 132 dB. The recessed rear connector panel allows for flush wall placement, while the dual speakON™ and Phoenix connectors ensure fast and reliable setup. The enclosure, built from 15 mm multi-laminate birch plywood, features mounting points and an integrated M20 top hat, making the Venu 112 V2 suitable for both fixed installations and touring use.

325d0907-6ec7-429d-976c-b8adaeca1cb4.jpg


VENU 112v2WH

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

VENU 112v2WH

12" COMPACT REFLEX SUBWOOFER, 8 ?, 600 W (WHITE)

HIGHLIGHTS

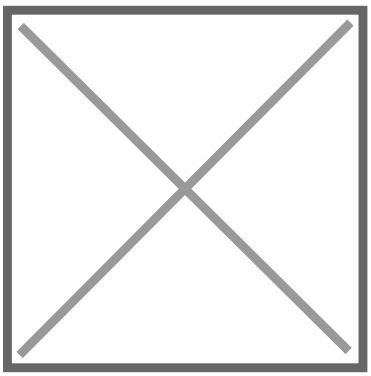


COMPACT POWER WITH PRECISION

The **12” high-excursion driver** with **4” copper voice coil** delivers tight response and excellent thermal durability, ensuring **defined low-end even at high SPL levels**.

REFLEX SYSTEM DESIGN FOR DEEPER BASS


The **compact reflex design** provides **extended reproduction down to 40 Hz**, making the Venu 112 V2 ideal for **spaces needing powerful bass without bulky enclosures**.

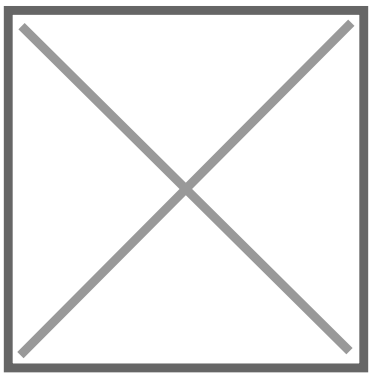

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

VENU 112v2WH

12" COMPACT REFLEX SUBWOOFER, 8 ?, 600 W (WHITE)

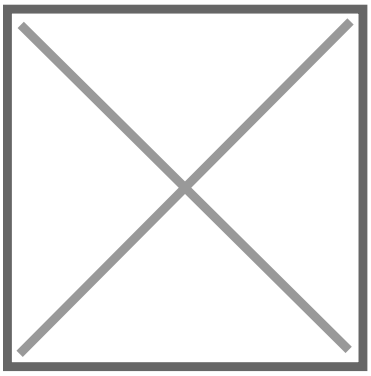

CUSTOM COLORS AVAILABLE UPON REQUEST

The Venu 112 V2 is ingeniously enhanced in aesthetics as well as functionality thanks to its colour customisation providing the chance to own a bespoke product that will compliment any location (the colors visible in the image are examples for illustrative purposes)

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

VENU 112v2WH

12" COMPACT REFLEX SUBWOOFER, 8 ?, 600 W (WHITE)

PRODUCT DETAILS

KEY FEATURES

- Recessed connector panel allows flush wall placement while maintaining full accessibility and durability
- Fast and secure connectivity with dual speakON™ and Phoenix connectors featuring link outs for quick daisy-chaining
- Durable 15 mm birch plywood construction, engineered to be resonance-free and long-lasting for permanent installs
- Fine-textured polyurethane coating, highly resistant to scratches and impact, ideal for public or commercial spaces
- Integrated rigging points for wall or ceiling brackets, plus M20 top hat included for mobile or pole-mounted setups

SPECIFICATIONS

Frequency Response	40 Hz - 160 Hz ±3 dB
Efficiency	99 dB 1W/1m
Crossover points	80 Hz - 160 Hz active
Nominal impedance	8 ?
Power Handling	600 W AES
Maximum output	126 dB cont, 132 dB peak
Driver configuration	1x 12” LF
Connectors	1x Phoenix with link out and 1x speakON™ with link out
Weight	27 kg (59.5 lbs)
Dimensions (W x H x D)	490mm x 378mm x 430mm
Enclosure	15 mm birch plywood
Mounting	Optional top hat Yoke bracket positions Type 75 plate

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

VENU 112v2WH

12" COMPACT REFLEX SUBWOOFER, 8 ?, 600 W (WHITE)

Finish	Textured polyurethane
Grille	Perforated steel with foam filter
Colors	White (custom color available upon requests)

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it