



GS 230B

7M STRUCTURAL TOWER 30X30 BLACK, MAX LOAD 750KG (F70TBT112)

Our **GS 230** Ground Support structural tower has been designed for lifting loads up to 750 kg at a maximum working height of 7 m (extendable up to 8 m). Made of aluminium and steel, it can be used with an ER30, EC30 or EC40 truss bolted directly to the trolley and lifted with a self-braking winch fitted with a crank (optional motor). Designed and manufactured for indoor and outdoor use. Available in Silver and Black. Connection set no included.


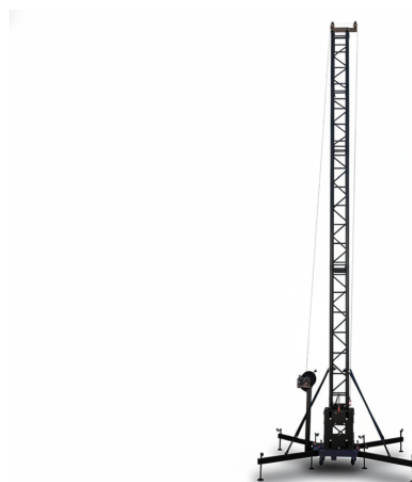


sample photo



GS 230B

7M STRUCTURAL TOWER 30X30 BLACK, MAX LOAD 750KG (F70TBT112)



GS 230B

7M STRUCTURAL TOWER 30X30 BLACK, MAX LOAD 750KG (F70TBT112)

PRODUCT DETAILS

KEY FEATURES

EC30 L truss mast

Compatible with ER30, EC30 and EC40 trusses

Safety system with locking sling. Easy assembly

SPECIFICATIONS

Material	Aluminum and steel
Maximum height	7 m / 22,96 ft
No. of sections	5 sections
Maximum Load	750 kg / 1653,47 lbs
Elevation system	Manual drive (winch) as standard, motor as option
Cable diameter	6 mm / 0,28 in
Unfolded base	2,84 x 2,84 m / 9.32 x 9.32 ft
Folded Base	0,72 x 0,64 m / 2.36 x 2,09 ft
Security systems	Yes
Weight	85 Kg / 187,39 lbs
Aluminum thickness	2 mm / 0,078 in
Main tube diameter	50 mm / 1,96 in
Down tube diameter	16 mm / 0,63 in
Colour	Black

GS 230B

7M STRUCTURAL TOWER 30X30 BLACK, MAX LOAD 750KG (F70TBT112)

Section dimensions

30 x 30 cm / 11,81 x 11,81 in

Winch

ALKO 1201 PLUS