AIR 15

PASSIVE 15" REFLEX-LOADED FIBREGLASS SUBWOOFER (RED)

The Air 15 is a reflex-loaded 15” fibreglass subwoofer with styling that compliments mid-high enclosures from both the Air series and Cyclone series. Its large-scale output allows fully formed systems to be achieved in any environment. Air 15’s non-resonant fibreglass enclosure contributes to its impressive SPL and low frequency extension capabilities. Key features include an IP-53 rating made possible by ‘ingress proof vent technology’ and UVresilient paint, allowing Air 15 to perform in both internal and external spaces requiring comprehensive coverage. Perfect for medium sized nightclubs and dance venues, larger bars, restaurants and beach clubs, retail settings, and theme parks.

AIR 15

392729cc-b3ce-4aba-8a1e-67b52524ff92.png

9ab5a556-5203-4de6-9f34-ac104b8f351c.png

af025c88-2c16-44ac-a1a7-b8c067


IP53

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

AIR 15

PASSIVE 15" REFLEX-LOADED FIBREGLASS SUBWOOFER (RED)

HIGHLIGHTS

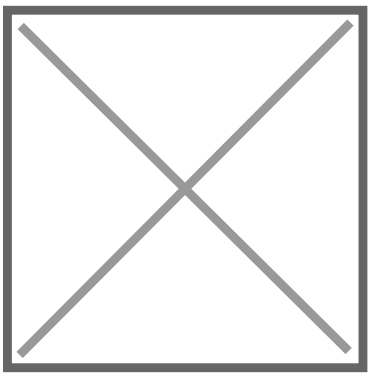


LARGE-SCALE OUTPUT

With styling that compliments mid-high enclosures from both the Air and Cyclone series, Air 15 offers a large-scale output in order to allow fully formed sound systems to be achieved in a variety of environments.

LOW-RESONANCE FIBREGLASS COMPOSITE CONSTRUCTION

The use of **fibreglass material** ensures a **rigid and stable enclosure**, minimizing cabinet resonance and contributing to **clearer and more accurate audio reproduction**.

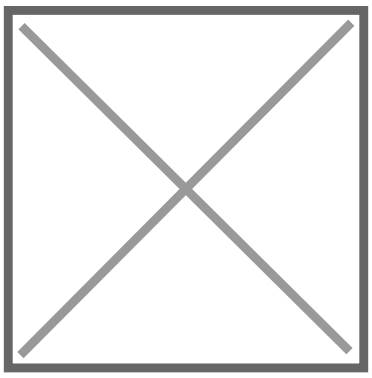

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

AIR 15

PASSIVE 15" REFLEX-LOADED FIBREGLASS SUBWOOFER (RED)

PRODUCT DETAILS

KEY FEATURES

- Tough high excursion transducer with 4” voice coil.
- Phoenix connector with link through for quick and reliable hook ups.
- Marine-grade stainless steel fittings.
- UV-resilient paint.

SPECIFICATIONS

Frequency response	45 Hz - 160 Hz ±3 dB
Efficiency	98 dB 1 W / 1 m
Nominal impedance	8 ?
Power handling	800 W
Maximum output	123 dB Cont, 129 dB Peak
Driver configuration	1x 15” LF
Connectors	Phoenix connector with link out
Enclosure	Fibreglass
Finish	Smooth cellulose
IP Rating	IP53
Dimensions (W x H x D)	487mm x 551mm x 644mm
Weight	37.7 kg (83.11 lbs)

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it