GF42W

ULTRA-COMPACT 4X2" FULL-RANGE PASSIVE SPEAKER (WHITE)

GF42 is an ultra-compact passive column loudspeaker with 4x2” ferrite drivers, designed with K-array™ PAT® (Pure Array Technology) to deliver consistent, controlled sound in a minimal footprint. With 100 W power handling and selectable impedance (8–32 ?), it offers excellent coverage and dispersion control for distributed audio applications.

Its sleek look and durable ABS enclosure make it ideal for fixed indoor and outdoor installations in settings such as restaurants, hotels, retail shops, public venues, and residential spaces, where performance and visual discretion are key.

With a frequency response of 160 Hz – 20 kHz and a 25° vertical / 90° horizontal coverage pattern, GF42 delivers clear speech and crisp music reproduction. For a complete, compact sound system, it pairs seamlessly with the GS6 subwoofer.

9a235683-fadc-4079-a8d8-ca1698255982.png


GF42W

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GF42W

ULTRA-COMPACT 4X2" FULL-RANGE PASSIVE SPEAKER (WHITE)

HIGHLIGHTS

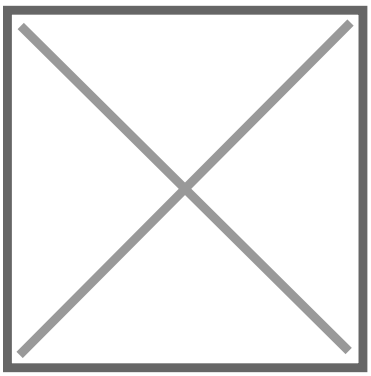


PURE ARRAY TECHNOLOGY (PAT®)

This technology enables **direct, intelligible and controlled sound**, even in reverberant or complex environments, **without the need for large spaces or bulky loudspeakers**.

ULTRA-COMPACT FORMAT AND IP54 RATING FOR DISCREET INDOOR/OUTDOOR INSTALLATIONS

Just 60 mm wide, with dust and splash protection—perfect for elegant applications in both public and private venues.

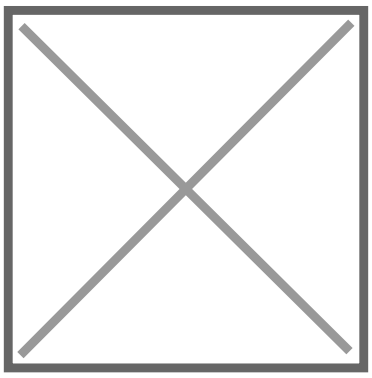

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GF42W

ULTRA-COMPACT 4X2" FULL-RANGE PASSIVE SPEAKER (WHITE)

PRODUCT DETAILS

KEY FEATURES

Ultra-compact (4x2") line array design: The small format allows for discreet installations in environments where space is limited or where minimal aesthetics are required, without sacrificing sound quality.

Wide 90° horizontal and 25° vertical coverage: allows you to reach large listening areas with a reduced number of speakers, maintaining clarity and intelligibility.

Durable ABS cabinet with IP54 rating: guarantees protection from dust and splashes, making the speaker suitable for both indoor and outdoor installations in permanent contexts.

100W nominal power and selectable impedance (8–32?): allows great configuration flexibility in distributed audio systems and guarantees compatibility with different types of amplifiers or speaker setups.

SPECIFICATIONS

Type	Passive loudspeaker
Transducers	4x2” ferrite magnet woofer
Frequency Response	160 Hz - 20 kHz (-6dB)
Max SPL	111 dB
Rated Power	100 W
Coverage	V. 25° | H. 90°
Connectors	Phoenix connector (4-pin euroblock)
Nominal Impedance	8 ? - 32 ? selectable
Dimensions (W x H x D)	60 x 340 x 66 mm (2,36 x 13,4 x 2,6 in)
Weight	0,8 kg (1.76 lb)
Material	ABS

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GF42W

ULTRA-COMPACT 4X2" FULL-RANGE PASSIVE SPEAKER (WHITE)

Colors	White
IP Rating	IP54

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it