



XPRS-82

## 8" 2-WAY ACTIVE LOUDSPEAKER

### Versatile XPRS Series


The XPRS2 Series couples the versatility and mobility of the original XPRS Series with elevated sound-performance and audio intelligibility to deliver a high-caliber speaker system for mobile DJs, live sound, houses of worship, rental and fixed installations.



XPRS-82

# 8" 2-WAY ACTIVE LOUDSPEAKER

## HIGHLIGHTS



CLASS D AMPLIFIER

### POWERFUL CLASS D AMPLIFICATION

The XPRS2 Series employs Class D Amplification with high output wattage for a powerful and premiere audio experience for performers and listeners alike. The XPRS82 and XPRS152 full-range speakers feature Class D 2000 W amplification, while the XPRS1152ST and XPRS1182ST subwoofers offer Class D 4000 W amplification.

### HIGH QUALITY, ROBUST BUILD

Pioneer DJ's all-new XPRS2 Series features a sleek all-black, protective plywood cabinet for performance in harsh outdoor and indoor environments. The series models all come with a durable handle to support system portability and handling during setup and take down. The XPRS2 Series also features rubber feet to create separation and shock absorption between surfaces.



## XPRS-82

# 8" 2-WAY ACTIVE LOUDSPEAKER




### FOUR DSP MODES

Both of the XPRS2 full-range speakers contain four different DSP preset modes—Live, Music, Speech and Studio Monitoring—to address the needs of different listening environments.

### 16 CUSTOMIZABLE USER DSP MODES

In addition to the four presets, each XPRS2 full-range speaker includes 16 custom user DSP modes - which can be saved with different names - to ensure the EQ settings are maximized for every scenario.

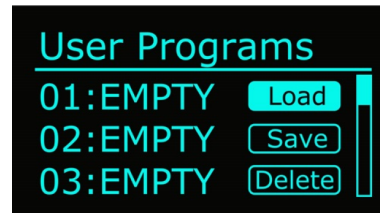

### FULL-RANGE SPEAKER DESIGN

The larger of the new full-range speakers, the XPRS152, features a 15" woofer and 3" voice coil with a 1" exit compression driver and 1.75" voice coil for superb sound coverage across mid to large venues. With a frequency response of 45 Hz – 20 kHz and a maximum SPL of 133 dB, the XPRS152 is ideal for live DJ sets, concerts, and applications in difficult audio environments, such as venues with poor acoustics.

XPRS-82

# 8" 2-WAY ACTIVE LOUDSPEAKER

## PRODUCT DETAILS

### SPECIFICATIONS

<b>Type</b>	8 inch 2-way active loudspeaker
<b>Amplifier Output</b>	Class D 2000W peak
<b>Power supply</b>	110 V to 240 V (50 Hz/60 Hz)
<b>Power consumption</b>	800 W
<b>Frequency Range</b>	60 - 20000 Hz
<b>DSP modes</b>	
Factory Presets (4 types)	
Sub Setting (Sub Setting menu is for selecting the high-pass frequency or matching subwoofer)	
EQ (4-band equalizer)	
User Programs (16 presets)	
<b>DSP presets modes</b>	Factory presets
<b>Maximum Sound Pressure</b>	127 dB
Cross Over Frequency 2 kHz	
<b>Inputs</b>	MIC / LINE x 1 (Combo), HI-Z / LINE x 1 (Combo), 3.5 mm stereo mini jack x 1 (Unbalanced input)
<b>Outputs</b>	MIX (XLR)
<b>Speaker Driver</b>	8 inch ferrite LF cone driver, 1.75 inch compression driver
<b>Finish</b>	Black paint, Rubber feet
<b>Handle</b>	2 metal handles (on left side and top)

XPRS-82

# 8" 2-WAY ACTIVE LOUDSPEAKER

<b>Pole socket</b>	35 mm socket
<b>Rigging point</b>	10x M10
Enclosure Plywood (TSCA)	
<b>Amplifier Protection</b>	Thermal limiting, Digital Limiter, Digital compressor
<b>Driver Protection</b>	Short circuit protection
<b>Power unit Protection</b>	Primary AC mains overcurrent protection, Primary AC mains overvoltage protection
<b>Size (WxHxD)</b>	272.7x460x302 mm
<b>Weight</b>	13.2 kg
<b>Accessories</b>	XPRS82 x 1 (not sold as a pair), Powerd cord, Quick start guide, Important Safety Precautions