

GF42TW

# ULTRA-COMPACT 4X2" FULL-RANGE PASSIVE HIGH IMPEDANCE SPEAKER (WHITE)

GF42T is an **ultra-compact passive column speaker** with **4x2" drivers** and a **built-in transformer**, designed for **70/100V high-impedance systems**. Powered by K-array™'s **Pure Array Technology (PAT®)**, it offers **controlled, even sound dispersion** in a sleek and elegant format, perfect for distributed audio applications in small to medium-size venues.


Its minimal design blends discreetly into any setting, while the **weather-resistant ABS enclosure** ensures durability for both indoor and outdoor use. With its **narrow vertical (25°) and wide horizontal (90°) coverage**, and a **frequency response up to 20 kHz**, GF42T is ideal for voice and background music in hotels, bars, restaurants, retail stores, and public spaces.



GF42TW

## ULTRA-COMPACT 4X2" FULL-RANGE PASSIVE HIGH IMPEDANCE SPEAKER (WHITE)

### HIGHLIGHTS

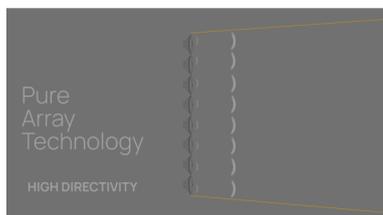

#### PURE ARRAY TECHNOLOGY (PAT®)

This technology enables **direct, intelligible and controlled sound**, even in reverberant or complex environments, **without the need for large spaces or bulky loudspeakers**.


#### ULTRA-COMPACT FORMAT AND IP54 RATING FOR DISCREET INDOOR/OUTDOOR INSTALLATIONS

Just 60 mm wide, with dust and splash protection—perfect for elegant applications in both public and private venues.



GF42TW

# ULTRA-COMPACT 4X2" FULL-RANGE PASSIVE HIGH IMPEDANCE SPEAKER (WHITE)

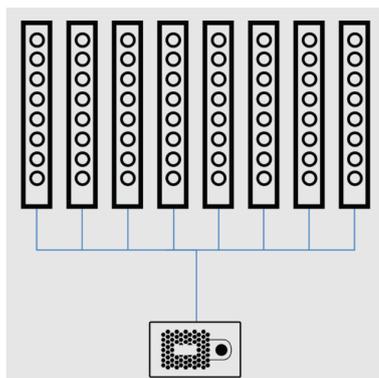

## INTEGRATED TRANSFORMER FOR MAXIMUM FLEXIBILITY

70/100V compatibility with **multi-tap power selection**  
(2/4/8/16W @100V – 1/2/4/8W @70V), for flexible multi-zone  
integration.

GF42TW

# ULTRA-COMPACT 4X2" FULL-RANGE PASSIVE HIGH IMPEDANCE SPEAKER (WHITE)

## PRODUCT DETAILS

### KEY FEATURES

Ultra-compact line array design (4x2"): small format allows discreet installations in rooms where space is limited or minimal aesthetics are required, without sacrificing sound quality.

Wide 90° horizontal and 25° vertical coverage: allows large listening areas to be reached with a small number of speakers, while maintaining clarity and intelligibility.

Durable ABS cabinet with IP54 rating: provides protection from dust and splashes, making the speaker suitable for both indoor and outdoor installations in permanent settings.

70/100V compatibility with 4-level power selection for maximum flexibility in multi-zone installations.

### SPECIFICATIONS

Type	passive loudspeaker
Transducers	4x2" ferrite magnet woofer
Frequency Response	160 Hz - 20 kHz (-6dB)
Max SPL	102 dB
Rated Power	2/4/8/16W @100V - 1/2/4/8W @70V
Coverage	V. 25°   H. 90°
Connectors	Phoenix connector (4-pin euroblock)
Dimensions (W x H x D)	60 x 340 x 66 mm (2,36 x 13,4 x 2,6 in)
Weight	1,3 kg (2,87 lbs)
Material	ABS
Colors	White

GF42TW

# ULTRA-COMPACT 4X2" FULL-RANGE PASSIVE HIGH IMPEDANCE SPEAKER (WHITE)

---

**IP Rating**

IP54 (G-IPCAP2 accessory required)