


GF162TW

ULTRA-COMPACT 16X2" LINE ARRAY COLUMN SPEAKER WITH BUILT-IN TRANSFORMER (WHITE)

The **GF162T** is a **compact passive column speaker** equipped with **16x2" ferrite drivers** and a **built-in transformer**, specifically designed for **high-voltage 70/100V systems**. Powered by **K-array™ Pure Array Technology (PAT®)**, it delivers **precise coverage** and **long-throw performance** in a discreet, low-profile format.

Ideal for **distributed installations** in spaces like **hotels, restaurants, shops, public areas and residences**, the **GF162T** combines the clarity and focus of a true line array with the simplicity of high-impedance connectivity.


Thanks to its **rugged ABS cabinet, IP54 protection**, and compact size, it is well-suited for **indoor and outdoor use**. For enhanced music performance, pair it with the **GS6 subwoofer** to create a balanced, full-range system.

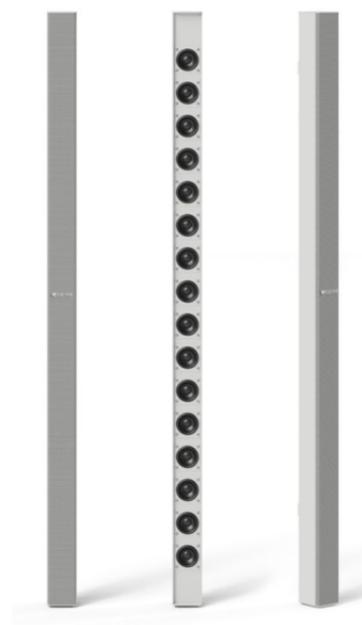

GF162TW

ULTRA-COMPACT 16X2" LINE ARRAY COLUMN SPEAKER WITH BUILT-IN TRANSFORMER (WHITE)

HIGHLIGHTS

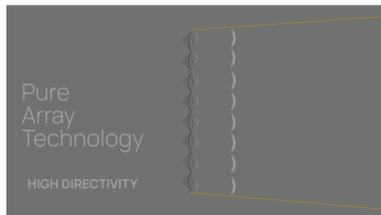

PURE ARRAY TECHNOLOGY (PAT®)

This technology enables **direct, intelligible and controlled sound**, even in reverberant or complex environments, **without the need for large spaces or bulky loudspeakers**.


ULTRA-COMPACT FORMAT AND IP54 RATING FOR DISCREET INDOOR/OUTDOOR INSTALLATIONS

Just 60 mm wide, with dust and splash protection—perfect for elegant applications in both public and private venues.



GF162TW

ULTRA-COMPACT 16X2" LINE ARRAY COLUMN SPEAKER WITH BUILT-IN TRANSFORMER (WHITE)

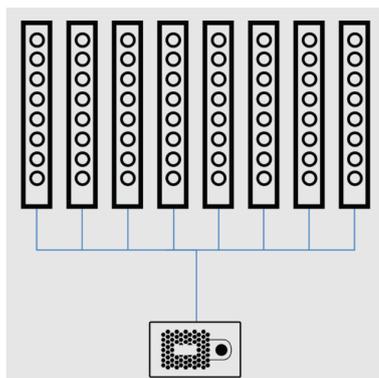

INTEGRATED TRANSFORMER FOR MAXIMUM FLEXIBILITY

70/100V compatibility with **multi-tap power selection**
(2/4/8/16W @100V – 1/2/4/8W @70V), for flexible multi-zone
integration.

GF162TW

ULTRA-COMPACT 16X2" LINE ARRAY COLUMN SPEAKER WITH BUILT-IN TRANSFORMER (WHITE)

PRODUCT DETAILS

KEY FEATURES

Lightweight construction and IP54: ideal for indoor and outdoor environments.

16 2" in-line drivers: Superior audio performance in a slim, compact body.

Selectable power up to 400W: adaptability to environments of different scales.

SPECIFICATIONS

Type passive loudspeaker	
Transducers	16x2" ferrite magnet woofer
Frequency Response	135 Hz - 20 kHz (-6dB)
Max SPL	115 dB
Rated Power	8/16/32/64W @100V 4/8/16/32W @70V
Coverage	V. 7° H. 90°
Connectors	Phoenix connector (5-pin euroblock)
Dimensions (W x H x D)	60 x 1200 x 66 mm (2,36 x 47,24 x 2,56 in)
Weight	4,2 kg (8,05 lbs)
Material	ABS
Colors	White
IP Rating	IP54