Q-AIR MINI IP

PORTRAIT QAIR MINI BATTERY-POWERED SPOTLIGHT IP

Q-AIR MINI IP

The **Mini Portrait Q Air IP PAR** is designed for lighting professionals who demand **flexibility, reliability, and top-tier performance**. Featuring **4 × 12W 6-in-1 LEDs**, it delivers **vibrant, full-spectrum colors** and **precise color accuracy**, perfect for **live events, architectural lighting, and temporary installations**.

Its **integrated rechargeable battery** provides up to **15 hours of uninterrupted operation**, freeing you from constant power connections and enhancing mobility on any project. With a **robust IP65-rated housing**, it is **fully protected against water and dust**, making it ideal for **both indoor and outdoor use**.

Compact, lightweight, and **easy to transport and install**, the Mini Portrait Q Air IP PAR combines **portability, versatile control options, and rugged construction**, making it a **must-have tool for professional lighting designers** who need performance without compromise.

Product compatible with CTL0154 WT-Q-AIRIP wireless transmitter

ba68d369-6925-4ec2-91a2-813b593bee69.jpg


Battery Powered RGBW 4in1 LED Technology Wireless Control RDM Communication

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

Q-AIR MINI IP

PORTRAIT QAIR MINI BATTERY-POWERED SPOTLIGHT IP

HIGHLIGHTS

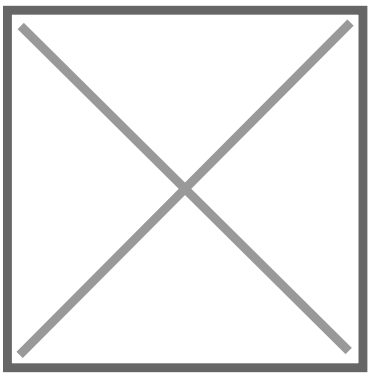


TOTAL AUTONOMY

The built-in rechargeable battery provides up to **15 hours of continuous operation**, allowing complete freedom from power outlets and cables. Perfect for outdoor events or temporary installations.

VIBRANT AND ACCURATE COLORS


Equipped with **4 × 12W 6-in-1 LEDs**, it delivers **bright, full-spectrum colors with precise mixing**, ideal for creating **dynamic and immersive atmospheres** on stage or in architectural projects.

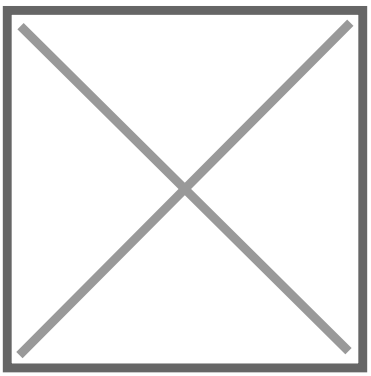

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

Q-AIR MINI IP

PORTRAIT QAIR MINI BATTERY-POWERED SPOTLIGHT IP

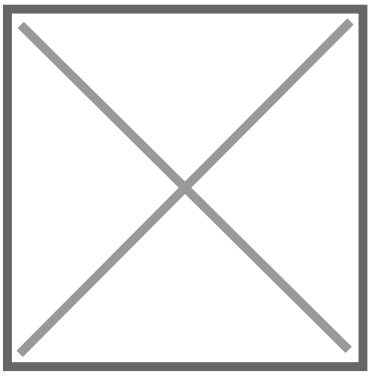

PORTABILITY AND DURABILITY

With an **IP65-rated housing** resistant to water and dust, plus a compact, lightweight design, the Mini Portrait Q Air IP PAR is **easy to transport, install, and use** in both indoor and outdoor environments, without compromising professional-grade reliability.

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

Q-AIR MINI IP

PORTRAIT QAIR MINI BATTERY-POWERED SPOTLIGHT IP

PRODUCT DETAILS

KEY FEATURES

- Compact and Lightweight Aluminum Enclosure and facilitates transport and installation
- IP65-rated Protection ensures reliable indoor and outdoor use, fully resistant to dust and water jets from any direction
- LED Emitters 4 × 12W 6-in-1 LEDs (RGBWA+UV) for dynamic visual effects
- Extended DMX Protocol Supports 6, 8, and 12 selectable channel modes for flexible programming in different venues
- Variable-Frequency Strobe Ultra-slow to high-speed for rhythmic accents and chase sequences
- Manual RGBWA+UV Control Precise color and intensity adjustments
- Selectable PWM Refresh Rates 4 options for flicker-free performance in live, studio, and broadcast environments
- 63 Preloaded Static Color Presets Quick deployment for wash, scenic, and architectural lighting without programming
- Embedded Wireless Transceiver 16 selectable channels for robust multi-system operation
- RF Remote Control Included Access essential functions like dimming, strobe, auto shows, and color selection
- Operational Modes DMX512, Master/Slave, Stand Alone, Wireless DMX, and RF Remote Control for rapid deployment or structured show control
- ntegrated Rechargeable Battery Up to 15 hours of continuous operation with 4–6 hours charging time
- Charge-and-Operate Functionality Allows uninterrupted performance during recharging
- Intuitive Interface Adjustable backlight timeout for easy operation
- Screen Status Indicator Real-time feedback on network role and wireless channel assignment

SPECIFICATIONS

Power Supply	AC 90–240 V, 50/60 Hz

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

Q-AIR MINI IP

PORTRAIT QAIR MINI BATTERY-POWERED SPOTLIGHT IP

Power Consumption	55 W
Battery	Built-in rechargeable battery
Battery Life	Up to 15 hours
Charging Time	4–6 hours
Light Source	4 × 12W RGBWAUV LEDs (6-in-1)
Beam Angle	20°
LED Lifespan	50,000 hours
Flicker-Free	Yes (adjustable refresh rate from 1200 Hz to 6000 Hz)
Display	Backlit LCD
Color Rendering Index (CRI)	? 80
Color Range	Virtually unlimited color mixing / millions of color combinations
Dimmer	0–100% (0–255)
Operating Temperature	-10° – 40°C (14° – 104°F)
DMX Channels	6, 8, and 12 channel modes
Control Modes	Manual, Auto, RF, Wireless, DMX, Master/Slave, Sound
Mounting / Positioning	Adjustable bracket for flexible positioning, suitable for truss or elevated installation (using clamps)
Power Connectors	DC barrel jack IP Rating
IP Rating	IP65
Cooling	Natural cooling with silent operation
Material	Aluminum
Color	Black
Product Dimensions (W × D × H)	99 × 105 × 99 mm (3.89 × 4.13 × 3.89 in.)
Product Weight	1.2 kg (2.64 lbs)

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it