

## SONIX CT4W WALL PANEL WITH 4" TFT TOUCH SCREEN (LIGHT GREY) FOR SONIX M0808D & M1616D

When it comes to complex multi-zone installations, it's almost natural that each zone requires local control of at least the main functions, such as volume, mute, and any on/off buttons for any equipment connected to the main matrix via GPI/O commands (e.g., curtain up/down buttons, projector or TV activation, video conferencing system activation, etc.). SoniX CT4W allows for all this, providing the installer with all the tools to customize the functions and layout.


Equipped with a 4" TFT color touchscreen, the SoniX CT4W runs the Android 10 operating system. It's powered by a 1.6GHz 64-bit quad-core ARM Cortex A53 processor. The control protocol is UDP; address setting is TCP/IP with a standard RJ-45 connection.

Power is available via both PoE (a PoE-capable network switch is required) and +12VDC via an external power supply (not included). Installation is very simple, thanks to the detailed assembly instructions.



# SONIX CT4W WALL PANEL WITH 4" TFT TOUCH SCREEN (LIGHT GREY) FOR SONIX M0808D & M1616D

## HIGHLIGHTS

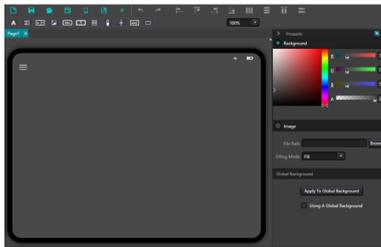

### FULLY CUSTOMIZABLE INTERFACE

The graphical interface can be fully customized using the application built into the SoniX MD series matrix switcher's Windows PC control software, accessible from the "User Interface" function in the Settings menu.

A library of functions (labels, buttons, sliders, level indicators, matrix structure, and more) allows you to quickly create the graphical interface needed for specific zone wall control.

### SUITABLE FOR ALL DEVICES

The Template menu allows you to define the screen size, allowing you to create graphical interfaces not only for the SoniX CT4W wall switches, but also for any mobile device or tablet, whether Android or iOS (you must download the DSP Pro app from Google Play or the App Store).

Name	Platform	Idiom	Templates	Density	
	Android	Pad	1366 x 1024	2	Edit
	iOS	Phone	1125 x 2436	3	Edit



# SONIX CT4W WALL PANEL WITH 4" TFT TOUCH SCREEN (LIGHT GREY) FOR SONIX M0808D & M1616D

## PRODUCT DETAILS

### KEY FEATURES

4-inch / 480x480pixel TFT Touch Screen

Quad-Core ARM Cortex A53 CPU 1.6GHz / 64-bit Processor

UDP Control Protocol

TCP/IP with PoE function

Micro-SD Port for Android OS upgrade (The unit comes with OS already installed)

### SPECIFICATIONS

<b>Display</b>	Capacitive 4" TFT touch screen
<b>Resolution</b>	480x480px
<b>Operating System</b>	Android 10
<b>Processor</b>	Quad - core ARM Cortex A53 CPU 1.6GHz, 64 - bit
<b>Control Protocol</b>	UDP
<b>Address Setting Method</b>	TCP/P
<b>Signal Line Length</b>	100 meters
<b>Power Supply Method</b>	PoE & + 12VDC (Power Adapter non supplied)
<b>Connection Port</b>	RJ - 45
<b>Power Consumption</b>	< 8W
<b>Color</b>	Light Gray
<b>Operating Temperature</b>	-10°C / +50 °C

# SONIX CT4W WALL PANEL WITH 4" TFT TOUCH SCREEN (LIGHT GREY) FOR SONIX M0808D & M1616D

---

<b>Cutout Size (WxDxH)</b>	87.2x40.5x87.2mm
<b>Product Size (WxDxH)</b>	86.2x40.5x 86.2mm
<b>Power Supply</b>	8V - 48V (Standard 12V/1A); Network Port PoE Power Supply 48V