


GT12

PASSIVE 2X 12" WOOFER + 1.4" DRIVER FULL RANGE 650W LOUDSPEAKER BLACK

The GT12 loudspeakers are high-performance compact professional PA speakers featuring a robust aluminum design. They are engineered for live sound, surround sound systems, and outdoor and portable sound reinforcement applications where high output, clarity, and compact form factor must deliver professional results without compromise.

Dedicated presets ensure optimal performance when powered by compatible amplifiers, delivering high headroom and controlled low-frequency response in compact live sound systems. For extended low-frequency performance, the GT12 can be paired with dedicated subwoofers for full-range reinforcement.



GT12

**PASSIVE 2X 12" WOOFER + 1.4" DRIVER FULL RANGE
650W LOUDSPEAKER BLACK**



GT12

PASSIVE 2X 12" WOOFER + 1.4" DRIVER FULL RANGE 650W LOUDSPEAKER BLACK

HIGHLIGHTS




COMPACT, PRECISE, EVERYWHERE.

GT Line is a family of compact point-source loudspeakers designed to combine professional audio performance with maximum installation flexibility. The project is built around a simplified acoustic concept that prioritizes clarity, consistency, and adaptability across different environments and system configurations.

ENGINEERED FOR PERFORMANCE

The GT Series combines carefully selected woofers with dedicated high-frequency drivers to deliver full-range sound in a compact and efficient design, with extended frequency response and a natural tonal character. Rotatable high-frequency drivers allow flexible orientation and controlled dispersion, helping maintain clear and consistent high-frequency reproduction across different configurations.

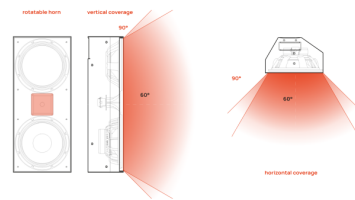

GT12

PASSIVE 2X 12" WOOFER + 1.4" DRIVER FULL RANGE 650W LOUDSPEAKER BLACK

PRODUCT DETAILS

KEY FEATURES

Arrayable

Rotatable Coverage

Slim design and weather resistant

IP54 suitable for indoors and outdoors installations with included IP accessory

Aluminum sealed box

Scalability, enhanced coverage, directional control, configurable

SPECIFICATIONS

Type	Passive Point-source loudspeaker
Transducers	12" ferrite magnet woofer - 1.4" compression driver + 12" passive radiator
Frequency Response	70 Hz - 19 kHz (-6 dB, with dedicated preset)
Max SPL	136 dB (peak) half space
Rated Power	650 W
Coverage	V. 60° - H. 90° Rotatable
Connectors	2x SpeakOn NL4 – 1+ 1- (signal); 2+ 2- (through)
Nominal Impedance	8 ?
Dimensions	340 x 800 x 215 mm (13.38 x 31.49 x 8.46 in)
Weight	17 kg (37.47 lb)
Material	Aluminum

GT12

**PASSIVE 2X 12" WOOFER + 1.4" DRIVER FULL RANGE
650W LOUDSPEAKER BLACK**

Finishes

Black