


SC92BK200GD

SPEAKER CABLE SPEAKON 4 POLES FEMALE - XLR 3 POLES MALE / 20 MT

These twinaxial speaker cable lines are a valid product to connect speaker systems with long cable run and large conductor areas or shorter bridge cables with lower power requirements. The section of 1.0 mm² satisfies a wide range of requirements. It is supplied with robust PE insulation and a flexible PVC jacket suitable to all sort of applications.



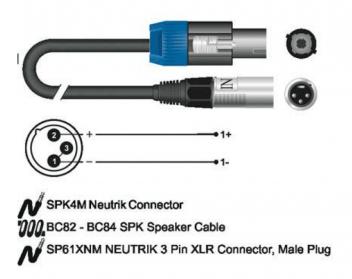



SC92BK200GD

SPEAKER CABLE SPEAKON 4 POLES FEMALE - XLR 3 POLES MALE / 20 MT

PRODUCT DETAILS

KEY FEATURES

Connectors: Speakon 4 poles female SPK4M / XLR 3 poles male SP61XNM INCO

Twinaxial BC82SPK speaker cable

Wire area: 1.00 mm²

Cable diameter: 7.0 mm

PVC jacket

PE insulation grants very low capacity

Flexibile, easy winding

Application: live, studio

Length: 20 mt

Connectors

SPECIFICATIONS

Wire area	1.00 mm²
Cable diameter	7.0 mm
PVC jacket	

Speakon 4 poles female SPK4M / XLR 3 poles male SP61XNM INCO

