

KT2

1X2" ULTRA-COMPACT PASSIVE POINT SOURCE SPEAKER WITH SELECTABLE IMPEDANCE (BLACK COLOR)

The **Tornado-KT2** is a **point source loudspeaker** featuring a **2" neodymium woofer**, designed for wall-mounted installations where **minimal footprint**, **discreet aesthetics**, and **clear sound reproduction** are essential. Its aluminum enclosure ensures durability and reliability, making it suitable for professional architectural and distributed audio systems. KT2

The Tornado-KT2 features a **4-pin Euroblock** connector and **selectable impedance (8 Ω / 32 Ω)** for flexible integration, with **70V and flush-mounted versions** for walls or ceilings available upon request. Furthermore, KT2 loudspeakers can be customized with any RAL color to enhance their distinctive aesthetics.

*The system is certified in accordance with the **EN 54-24:2008 standard** as a Type B loudspeaker, making it fully suitable for integration into voice evacuation (EVAC) and fire alarm systems in both indoor and outdoor situations thanks to its IP65 protection rating.

fb386242-5b70-4572-bab3-9fb917ae07b1.webp

2d58f771-33d0-4c81-8e60-93e863827634.webp

e017ead8-a2c7-47aa-bd01-e9

IP65

KT2

1X2" ULTRA-COMPACT PASSIVE POINT SOURCE SPEAKER WITH SELECTABLE IMPEDANCE (BLACK COLOR)

HIGHLIGHTS



COMPACT SOUND SOURCES

With the ability to **effortlessly reproduce both speech and music**, the **Tornado line** is an **excellent choice** for **fixed applications** such as **transportation hubs**, **museum displays**, **Marine applications**, **restaurants**, and **retail**, as well as in **hidden locations** such as the **chancel steps** in **houses of worship**.


TURN-KEY AUDIO SOLUTION

Designed for high-quality distributed systems housed in an aluminum enclosure carved entirely from a single metal block which helps to disseminate heat produced by the loudspeakers and maximize performance.



KT2

1X2" ULTRA-COMPACT PASSIVE POINT SOURCE SPEAKER WITH SELECTABLE IMPEDANCE (BLACK COLOR)

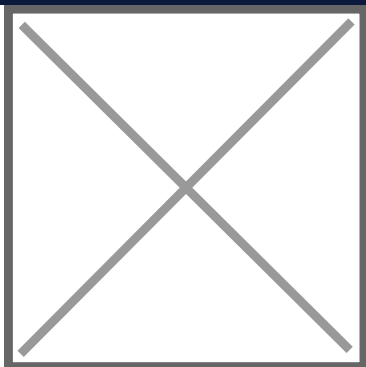

MAKE IT ACTIVE

Suitable for space-sensitive and architectural design installations, the Tornado line is a turnkey solution designed as passive speakers. However, Tornado speakers can easily be converted into self-powered devices by inserting the Tornado-specific amplifier module.

CUSTOM COLORS AVAILABLE UPON REQUEST

Customize your project by color matching your system to any RAL code to help you better integrate the speakers into a wide variety of venues and places.



KT2

1X2" ULTRA-COMPACT PASSIVE POINT SOURCE SPEAKER WITH SELECTABLE IMPEDANCE (BLACK COLOR)

PRODUCT DETAILS

KEY FEATURES

- High performance-to-size ratio
- Single 2" long excursion full range driver
- Wide-range frequency response
- Double voice-coil driver for variable impedance
- 70V version available
- EN54-24 compliant
- Convertible to active configuration via dedicated accessory.

SPECIFICATIONS

Type	Passive Point Source
Transducers	1x2" Neodymium Magnet Woofer
Frequency Response	150 Hz - 18 kHz (-6 dB, with dedicated preset)
Max SPL	107 dB (peak, calculated using a signal with crest factor 4 [12dB] measured at 8 m then scaled at 1 m.) Max SPL FULL RANGE
Coverage	V. 90° H. 90°
Nominal Impedance	selectable 8 Ω / 32 Ω
Power Handling	18 W
Connectors	4-pin Euroblock

KT2

1X2" ULTRA-COMPACT PASSIVE POINT SOURCE SPEAKER WITH SELECTABLE IMPEDANCE (BLACK COLOR)

IP Rating	IP65
Dimensions (WxHxD)	125 x 125 x 119 mm (4.92 x 4.92 x 4.69 in.)
Weight	0,65 kg (1.43 lbs.)
Material	Alluminum
Standard Colors	Black / White
Custom colors	Available in any RAL color
Premium Metal Finishes	Not Available
Marine-grade Treatment	Not Available