

KU44 I

4X4" ULTRA-SLIM PASSIVE SUBWOOFER WITH SELECTABLE IMPEDANCE (BLACK COLOR)

KU44 I

The Rumble-KU44 I is an ultra-slim passive subwoofer designed to deliver precise and controlled low-frequency reinforcement in refined audio systems, invisible sound systems, and multi-zone sound systems, where powerful bass must integrate seamlessly with architecture and design.

The stainless steel enclosure houses two 4" neodymium magnet woofers paired with two 4" passive radiators, delivering extended bass performance with a 45 Hz – 150 / 500 Hz (-6 dB) frequency response and up to 116 dB peak SPL, all within a compact architectural format. Selectable impedance and a 4-pin Euroblock connector allow the KU44 I to easily integrate into distributed audio systems, and a dedicated preset ensures optimal performance when powered by K-array amplifiers.

All Rumble loudspeakers can be customized with any RAL color or finished in a variety of premium metallic finishes to further enhance their distinctive aesthetics. Furthermore, to meet specific design and installation requirements, IP65 marine-grade protection, flush-mounted versions, and 2 ? impedance variants are also offered.

*For full-range performance, the Rumble-KU44 I pairs perfectly with compact mid-high loudspeakers such as the Vypers or Lizard-KZ14, completing a discreet and high-resolution audio solution.

[a596ff62-c269-42fa-8444-c81d43de9b8f.webp](#)

[b53cb301-f9a8-4483-a107-fe034bde03f.webp](#)

[21fc7bc9-9fc8-408d-8bdc-fcfc24](#)

IP64

KU44 I

4X4" ULTRA-SLIM PASSIVE SUBWOOFER WITH SELECTABLE IMPEDANCE (BLACK COLOR)

HIGHLIGHTS



EXTREMELY COMPACT SUBWOOFERS

Ultra-compact, yet powerful bass system engineered for maximum linear excursion and minimum residual noise that boast extended low-frequency response, Rumble was made to fit elegantly into any application.

MAXIMUM DISCRETION AND AUDIO QUALITY

Engineered to hide from sight without compromising on high-quality audio performance.



KU44 I

4X4" ULTRA-SLIM PASSIVE SUBWOOFER WITH SELECTABLE IMPEDANCE (BLACK COLOR)




INVISIBLE FULL-RANGE APPLICATION

The Rumble line is the perfect companion to the Lyzard, Vyper, Tornado and Anakonda speakers: the combination provides full-range frequency response with exceptional output and a virtually invisible profile.

EXTREMELY RESISTANT

The subs are made entirely of **steel**, making them extremely resistant, even when deployed outside in tough weather conditions. This is ideal for water-front environments where ordinary bass speakers would corrode. They are impenetrable by foreign objects and agents like dust, sand or water, which can damage an ordinary audio element over time

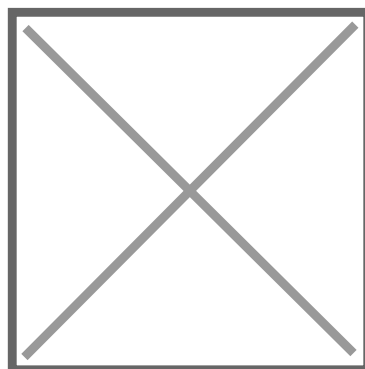

KU44 I

4X4" ULTRA-SLIM PASSIVE SUBWOOFER WITH SELECTABLE IMPEDANCE (BLACK COLOR)



CUSTOM COLORS AND PREMIUM FINISHES AVAILABLE UPON REQUEST

The Rumble series is offered in a semi-matte **black** or an elegant **white** finish and can be customized to match any **RAL** code.

Premium **brushed** or **polished** stainless steel finishes give the products a chameleon-like ability to reflect surrounding surfaces and blend in with the background.

Also available in **24K gold**-plated aluminum and Rose Gold for the most luxurious finish - ideal for prestigious design projects and upscale applications.

Rumble subwoofers are manufactured to achieve exacting standards and are subject to rigorous quality control system in Italy.

KU44 I

4X4" ULTRA-SLIM PASSIVE SUBWOOFER WITH SELECTABLE IMPEDANCE (BLACK COLOR)

PRODUCT DETAILS

KEY FEATURES

45 Hz - 150 / 500 Hz frequency response

8/32 ? selectable Impedance

2 ? Impedance version when used in full-range system (KU44-2 model)

116 dB SPL (peak)

IP64 suitable for indoors and outdoors installations (IP65 grade with included IP accessory)

SPECIFICATIONS

Type	Passive Subwoofer
Transducers	2x 4" Neodymium Magnet Woofer + 2x 4" passive radiators
Frequency Response	45 Hz - 150 / 500 Hz (-6 dB, with dedicated preset)
Max SPL	116 dB (peak, calculated using a signal with crest factor 4 [12dB] measured at 8 m then scaled at 1 m.)
Coverage	Omni
Nominal Impedance	selectable 8 ? / 32 ?
Power Handling	120 W
Connectors	4-pin Euroblock
IP Rating	IP64 (IP65 grade with dedicated IP accessory)
Dimensions (WxHxD)	500 x 116 x 100 mm (19.7 x 4.6 x 4 in.)
Weight	5.9 kg (13 lbs.)

KU44 I

4X4" ULTRA-SLIM PASSIVE SUBWOOFER WITH SELECTABLE IMPEDANCE (BLACK COLOR)

Material	Stainless Steel
Standard Colors	Black / White
Custom colors	Available in any RAL color
Premium Metal Finishes	Available in 24K Gold / Rose Gold / Polished or Brushed Steel
Marine-grade Treatment	Available cataphoresis treatment applied by electroplating for total coating against chemical and environmental corrosion