CYC118v2-B

18" PASSIVE SUBWOOFER WITH BASS REFLEX BLACK

CYC118v2-B

The **Void Acoustics Cyclone 118** is an IP-55 rated, reflex-loaded passive subwoofer engineered to deliver dedicated low-frequency reinforcement for the Cyclone Series loudspeakers. Its weather-resistant construction features marine-grade stainless steel fittings and a UV-resilient finish, making it ideally suited for permanent outdoor installations.

Showcasing the smooth, sculpted aesthetics signature to the Cyclone range, the Cyclone 118 combines striking visual appeal with exceptional practicality and durability. Designed to integrate seamlessly with the rest of the Cyclone lineup, it provides a powerful low-end solution for resorts, bars, poolside areas, and hospitality venues.

Available as standard in **red with a black grille**, **black with a black grille**, and **white with a white grille**, with custom **RAL** and **KROME** finishes available upon request.

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

CYC118v2-B

18" PASSIVE SUBWOOFER WITH BASS REFLEX BLACK

HIGHLIGHTS

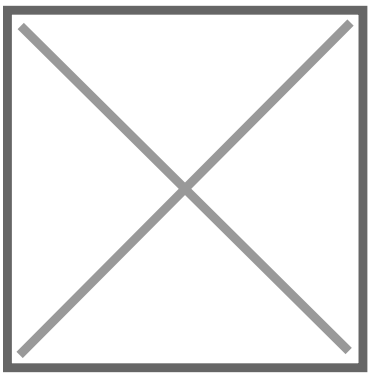

DEDICATED LOW-FREQUENCY EXTENSION

The Cyclone 118 is designed to add dedicated low-frequency support in installations where Cyclone Series loudspeakers are used. Featuring the distinctive smooth, sculpted forms of the Cyclone Series, the Cyclone 118 combines striking aesthetics with practical durability.

ALSO AVAILABLE IN COSTUME RAL COLORS AND KROME FINISHES

Available as standard in red with a black grille, black with a black grille, and white with a white grille. Custom RAL and KROME finishes are available upon request.

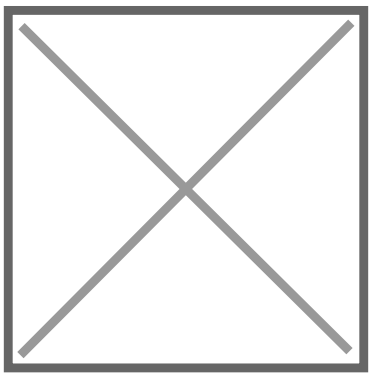

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

CYC118v2-B

18" PASSIVE SUBWOOFER WITH BASS REFLEX BLACK

PRODUCT DETAILS

KEY FEATURES

- 18" reflex-loaded subwoofer
- Weather-protected, low-resonance fibreglass composite enclosure with an IP-55 rating
- UV-resilient finish
- Available as standard in red with a black grille, black with a black grille, and white with a white grille
- Custom RAL and KROME finishes available upon request

SPECIFICATIONS

Frequency Response (-10 dB IEC 60268-5)	30 Hz - Preset dependent
Max. Output	126 dB RMS, 132 dB peak
Nominal Dispersion	Omni
Efficiency (measured in the half-space)	97 dB 1 W/1 m
Driver Configuration	1x 18" LF
Max. Power Handling	1200 W AES
Nominal Impedance	8 ?
Suggested Amplifier (Minumun)	Bias Q2+
Weight	NET 45,6 kg (100.5 lbs.) - GROSS 55,8 kg (123,2 lbs.)
Dimensions (HxWxD)	556 x 674,1 x 570 mm (21,9 x 26,5 x 22,4 in.)
Grado di Protezione IP	IP-55
Connections	Phoenix with connection output

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

CYC118v2-B

18" PASSIVE SUBWOOFER WITH BASS REFLEX BLACK

Enclosure	Fiberglass composite
Finish	Smooth cellulose
Color	Black

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it