

HTMA-2506 TOUCH 250W 6-ZONES MIXER AMPLIFIER WITH TIMER, USB, SD, BT AND TUNER


HTMA TOUCH series is a line of amplifiers for PA with integrated mixer whose main feature is ease of use. The **4.3" TFT touch display** allows **weekly programming of playlists**, combining USB, SD-Card, FM & AM radio. It also offer BT streaming connection to let you use tablets, mobile phones, and other BT devices.

Amplification stage offer powers ranging from 150W to 350W (100V for each zone and the auxiliary output) to fit different venue sizes. Therefore, HTMA TOUCH are all-in-one tools that quickly solve all multi-zone PA needs in medium-sized venues, such as shops, pubs, bars, restaurants and more.



HTMA-2506 TOUCH 250W 6-ZONES MIXER AMPLIFIER WITH TIMER, USB, SD, BT AND TUNER

HIGHLIGHTS

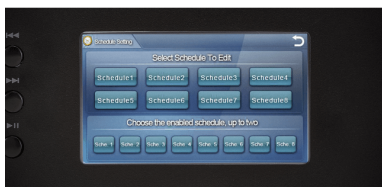

PROGRAMMABLE AUDIO CONTENT LISTS

8 scheduled playlists selectable in pair by week. For each schedule you can assign up to ten “*Actions*”, and for each of them you can set Starting Time, Week Day, Audio Source (among MP3 files on SD-Card and FM/AM radio stations), and up to 6 Zones simultaneously.

Maximum MP3 files number depends on storage space (up to **64GByte on SD-Card**) and duration of each **Action** (no more than 24h).

Programming is very simple and intuitive thanks to the **4.3” Color Touch display**.

HTMA-2506 TOUCH 250W 6-ZONES MIXER AMPLIFIER WITH TIMER, USB, SD, BT AND TUNER

PRODUCT DETAILS

KEY FEATURES

6 zones output with separated switch control

4.3" TFT touch screen

Player with USB, SD-Card, AM & FM Radio, BT Audio Streaming

Built-in MP3 player with program memory

Built-in Radio with up to 40 radio channels

Built-in BT receiver module

1 AUX input, 1 Mic input, 1 AUX output

Separate volume control for MP3/FM/BT, AUX, and Mic inputs

Bass & Treble tone adjustment, with Master Volume control

Weekly programmable schedule set with more than 100 daily presets

Mic input with muting priority

100V Power Outputs

Rack-Mount Kit

SPECIFICATIONS

Rated Power	250W
Speaker Outputs	100V
Harmonic Distortion	<0.5% (1kHz, 1/3 rate power)
AUX Output	100ohm, 1V (0dBV)

HTMA-2506 TOUCH

250W 6-ZONES MIXER AMPLIFIER WITH TIMER, USB, SD, BT AND TUNER

Input	Mic
Line Freq. response	50Hz-20kHz (± 3 dB)
Mic Freq. response	40Hz-16kHz (± 3 dB)
Harmonic distortion	< 0.5% (1kHz, 1/3 rated power)
S/N Ratio	Mic
2-Band EQ	Bass
BT Receiving Distance	10m
BT Standard	BT2.1+EDR
USB Connection	Type-B, Female
USB/SD-Card Drive Format	FAT32 format – max 64GByte
Player File Formats	MP3, WMF, and BT streaming
Protection	AC fuse, DC output protection, overload protection
Power Supply	AC220-240V/50-60Hz
Fuse	F4AL-250V
Power Consumption	350W
Unit Size (WxDxH)	418x338x88 mm
Package Size (WxDxH)	550x460x190 mm
Unit Weight	9,1kg
Package Weight	9,82kg