




XPRS-122

12" FULL-RANGE ACTIVE LOUDSPEAKER

Versatile XPRSion


The XPRS2 Series couples the versatility and mobility of the original XPRS Series with elevated sound-performance and audio intelligibility to deliver a high-caliber speaker system for mobile DJs, live sound, houses of worship, rental and fixed installations.



XPRS-122

12" FULL-RANGE ACTIVE LOUDSPEAKER

HIGHLIGHTS



CLASS D AMPLIFIER

POWERFUL CLASS D AMPLIFICATION

The **XPRS2** Series employs **Class D Amplification** with high output wattage for a powerful and premiere audio experience for performers and listeners alike. The XPRS102 and XPRS122 full-range speakers feature Class D 2000 W amplification, while the XPRS1152S and XPRS1182S subwoofers offer Class D 4000 W amplification.

HIGH QUALITY, ROBUST BUILD

Pioneer DJ's all-new XPRS2 Series features a *sleek all-black*, protective pollywood cabinet for performance in harsh outdoor and indoor environments. The series models all come with a durable handle to support system portability and handling during setup and take down. The XPRS2 Series also features rubber feet to create separation and shock absorption between surfaces.



XPRS-122

12" FULL-RANGE ACTIVE LOUDSPEAKER




FOUR DSP PRESET MODES

Both of the XPRS2 full-range speakers contain *four different DSP preset modes*—Live, Music, Speech and Studio Monitoring—to address the needs of different listening environments.

16 CUSTOMIZABLE USER DSP MODES

In addition to the four presets, each XPRS2 full-range speaker includes *16 custom user DSP modes* - which can be saved with different names - to ensure the EQ settings are maximized for every scenario.

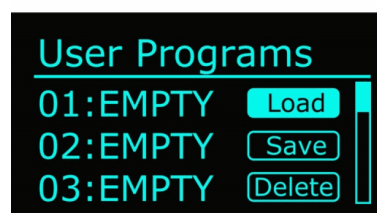

XPRS-122

12" FULL-RANGE ACTIVE LOUDSPEAKER

PRODUCT DETAILS

KEY FEATURES

Powerful Class D Amplification

High Quality, Robust Build

Four DSP Modes

16 Customizable User DSP Modes

Full-Range Speaker Design

SPECIFICATIONS

Type	12 inch 2-way active loudspeaker
Amplifier Output	Class D 2000W peak
Supported voltages	110 V to 240 V (50 Hz/60 Hz)
Power consumption	800 W
Frequency Range	48 - 20000 Hz
DSP modes	Factory Presets (4 types), Sub Setting (Sub Setting menu is for selecting the high-pass frequency or matching subwoofer), EQ (4-band equalizer), User Programs (16 presets)
DSP presets modes	Factory presets LIVE - MUSIC - SPEECH - MONITOR
Maximum Sound Pressure	131 dB
Cross Over Frequency	2 kHz
Inputs	MIC / LINE x 1 (Combo), HI-Z / LINE x 1 (Combo), 3.5 mm stereo mini jack x 1 (Unbalanced input)
Outputs	MIX (XLR)
Driver	12-inch ferrite LF cone driver, 1.75 inch compression driver
Finish	Black paint, Rubber feet

XPRS-122

12" FULL-RANGE ACTIVE LOUDSPEAKER

Handle	2 metal handles (on left side and top)
Pole socket	35 mm socket
Rigging point	10x M10
Enclosure	Plywood (TSCA)
Amplifier Protection	Thermal limiting, Digital Limiter, Digital compressor
Driver Protection	Short circuit protection
Power unit Protection	Primary AC mains overcurrent protection, Primary AC mains overvoltage protection
Dimensions (WxHxD)	362,7x637x350 mm
Weight	20.02 kgs
What's in the box	XPRS122 x 1 (not sold as a pair), Powerd cord, Quick start guide, Important Safety Precautions