GH4A

ULTRA-COMPACT 4’ FULL RANGE ACTIVE SATELLITE SPEAKER (BLACK)

The GH4A is a compact active satellite speaker designed for professional applications requiring clear and directional sound, even in acoustically challenging spaces. It features a 60W Class D amplifier, allowing it to power an additional KGEAR passive speaker or subwoofer, reducing external components.

Its 4" full-range driver with dual-coil neodymium magnet ensures accurate and powerful audio. The optimized enclosure minimizes rear emission, increasing system efficiency. Stainless steel build with IP64 rating (with G-IPCAP1) makes it suitable for indoor and outdoor use.

Equipped with Phoenix connectors, DC 24V input, audio output, mute contact, and auto ON/OFF function. Wall-mountable via GF-WALL bracket, and usable alone or in array configurations.

GH4A

324b3030-dc7e-4b84-a0dd-b72b57af71e3.png

f06d5abb-c083-4726-bb62-4c6272ae5593.png

fb4d12d1-15aa-40c6-82e9-ad2fd


Class-D

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GH4A

ULTRA-COMPACT 4’ FULL RANGE ACTIVE SATELLITE SPEAKER (BLACK)

HIGHLIGHTS

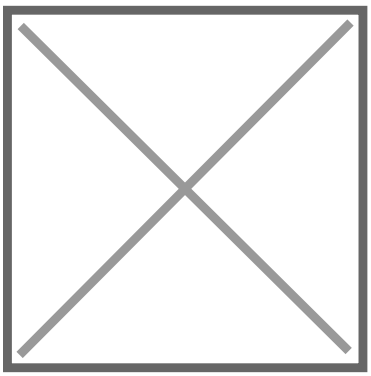


BUILT-IN AMPLIFICATION

The integrated amplifier allows you to drive a second speaker or passive subwoofer. This greatly simplifies installation, reduces the number of components required and makes it perfect for compact, elegant and highly efficient solutions.

WEATHER-RESISTANT CONSTRUCTION

The GH4A rugged durability is due in part to its weather-resistant construction: the compact stainless steel cabinets is built to withstand the rigors of touring and permanent installation, providing added peace of mind.

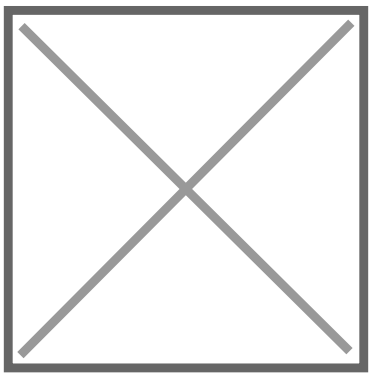

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GH4A

ULTRA-COMPACT 4’ FULL RANGE ACTIVE SATELLITE SPEAKER (BLACK)

PRODUCT DETAILS

KEY FEATURES

- Wall Mount Included: The GF-WALL swivel mount is included for easy and precise installation.
- Compact design, high performance: 4" full-range driver with dual-frequency neodymium magnet
- Reduced Rear Emission: the optimised cabinet design reduces rear dispersion, improving sound directionality and reducing unwanted reflections.
- Wall Mount Included: The GF-WALL swivel mount is included for easy and precise installation.

SPECIFICATIONS

Type	Active loudspeaker
Transducers	4” neodymium magnet full-range driver
Frequency Response	150 Hz - 20 kHz (-6dB)
Max SPL	116 dB
Rated Power	140 W
Coverage	V. 90° | H. 90°
Connectors	2x Phoenix connector (4-pin euroblock), Balanced Line in, Mute contact Power out, 24V DC IN (power supply not included)
Mains Connector	4PIN Euroblock, 2x Phoenix 1,5/ 4-ST-3,81 compatible
Nominal Impedance	4 ?
Amp Module	1-channel Class-D audio amplifier
Output Power	100W @ 2? (24V power)

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it

GH4A

ULTRA-COMPACT 4’ FULL RANGE ACTIVE SATELLITE SPEAKER (BLACK)

Power Consumption	30W Rated Load 1/8 Max Power
Protections	Thermal Protections (Power limiting - Thermal Shutdown), Short-circuit/overload output protections
Operating Range	12-24 V DC
Dimensions (W x H x D)	112x112x94 mm (4.41x4.41x3.70 in)
Weight	1,2 kg (2,65 lb)
Material	Stainless steel
Colors	Black
IP Rating	IP64 (G-IPCAP1 accessory required)

Via Enzo Ferrari 10
62017 Porto Recanati (MC), Italy
info@frenexport.it