

GG6W

6.5" TWO-WAY FULL-RANGE PASSIVE SPEAKER (WHITE)

GG6 is a **6.5" two-way full-range speaker** designed to deliver **high-quality audio performance** in commercial environments, both **indoors and outdoors**. Its **compact and lightweight design**, combined with a discreet look, makes it ideal for **restaurants, hotels, retail spaces, conference rooms, and corporate settings**.

The **6.5" ferrite magnet woofer** ensures a **powerful reproduction of mid and low frequencies**, while the **1" aluminum dome tweeter** delivers **crisp and detailed highs**. The **weather-resistant ABS enclosure (IP56 rated)** and the **included wall-mounting bracket** make installation easy in any setting.


On the rear panel, a **70/100V transformer with line selector** allows use in **both high and low impedance systems**, making the GG6 **extremely flexible** and suitable for **large-scale installations**.



GG6W

6.5" TWO-WAY FULL-RANGE PASSIVE SPEAKER (WHITE)

HIGHLIGHTS

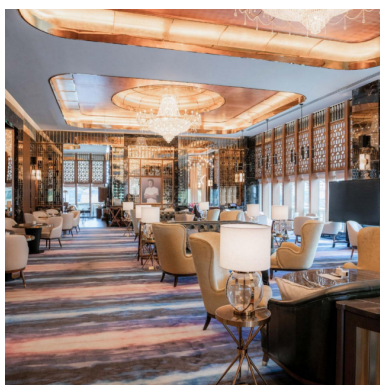

MAXIMUM ADAPTABILITY FOR EVERY TYPE OF INSTALLATION

Thanks to the integrated 70/100V transformer with power selector switch (2/4/8/16/32W), the GG6 can be connected to several loudspeakers in parallel while maintaining high energy efficiency. It is the perfect solution for those looking for a compact, durable loudspeaker with excellent sound quality, easily adaptable to different environments and application scenarios.

GG6W

6.5" TWO-WAY FULL-RANGE PASSIVE SPEAKER (WHITE)

PRODUCT DETAILS

KEY FEATURES

6.5" woofer and 1" aluminium dome tweeter for a defined and powerful sound

ABS housing with IP56 protection rating, also ideal for outdoor installations

Compact and lightweight design, easy to mount with bracket included

SPECIFICATIONS

Type	Passive loudspeaker
Transducers	6,5" ferrite magnet PP woofer 1" aluminum dome tweeter
Frequency Response	50 Hz - 20 kHz (-6dB)
Max SPL	115 dB
Rated Power	160W 2/4/8/16/32W @70/100V
Coverage	V. 90° H. 90°
Connectors	Screw type terminals
Nominal Impedance	Low 8 Ω Hi-Z 70V-100V
Dimensions (W x H x D)	193x310x180 mm (7.6x12.2x7.0 in)
Weight	2,8 kg (6.17 lb)
Material	ABS
Colors	White
IP Rating	IP56