


VENU 12

# PASSIVE 12" TWO-WAY SURFACE MOUNT LOUDSPEAKER

The 12" based Venu 12 has been designed to offer everything you could ask for from an installation loudspeaker. The entire Venu series has been created from the demands of many leading installation contractors and engineers around the world. There are many features that make the passive two-way Venu 12 so convenient to install and use: the Easy Hang wall bracket that supports the enclosure, either vertically or horizontally, and requires only one set of hands to attach the enclosure; the Phoenix connector with link through for quick and reliable hook ups; the rotatable 90° horizontal by 60° vertical high frequency horn allowing the correct dispersion to be maintained in vertical or horizontal mounting positions; electronic high frequency protection for increased reliability; M8 flying points for horizontal ceiling suspension; weather-resistant grille and fittings suitable for beach bars and other corrosive environments; the rotatable logo to allow for correct display in either vertical or horizontal positions; and an enclosure made entirely from 15 mm multi-laminate birch plywood.

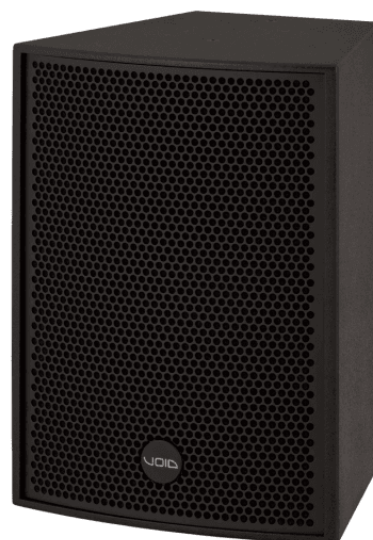

VENU 12

# PASSIVE 12" TWO-WAY SURFACE MOUNT LOUDSPEAKER

## PRODUCT DETAILS

### KEY FEATURES

- Compact and unobtrusive appearance
- Rotatable 90°H x 60°V HF waveguide
- 12" low frequency driver
- 1" high frequency compression driver
- Textured polyurethane finish, optional custom colours
- Multiple internal M8 rigging points
- Weather-resistant, perforated steel grille
- Applications: bar, club, lounge, hotel, restaurant

### SPECIFICATIONS

Frequency Response	50 Hz - 22 kHz ±3 dB
Efficiency	98 dB 1w/1m
Crossover Point	1.9 kHz passive
Impedance	8 ohms
Power Handling	400 Watts AES
Maximum Output	124 dB cont, 127 dB peak
Driver Configuration	1x12" LF, 1x1" HF compression driver
Dispersion	90°H x 60°V rotatable
Protection	HF electronic device

VENU 12

# PASSIVE 12" TWO-WAY SURFACE MOUNT LOUDSPEAKER

Connectors	1 x Phoenix with link out
Enclosure	15 mm birch plywood
Finish	Textured polyurethane
Grille	Weather-resistant perforated steel with foam filter
Dimensions (WxHxD)	385x522x330 mm
Weight	19.5 kg